





35%




DISCOUNT
ON THE LIST
PRICE


HIGHLINE - 10MM MAGNETIC TRACK LIGHTING SYSTEMS 48V DC						
TRACK CHANNELS AND ACCESSORIES						
TYPE A - SURFACE						
S. NO.	IMAGE	PRODUCT CODE & NAME	SIZE	DESCRIPTION		MRP
43		HL-SS-01M	1 MTR	1 MTR TRACK CHANNEL		1890
44		HL-SS-02M	2 MTR	2 MTR TRACK CHANNEL		3780
45		HL-SS 600 CURVE	Ø 600MM	SURFACE CURVE ARCS		3300
46		HL-SS-CJ	-	SURFACE CORNER JOINTER		1000
47		HL-SS-JOINTER	-	SURFACE TRACK MOUNTING ACCESSORY		140
48		HL-SS-HG KIT	-	SUSPENSION KIT		840
49		HL-SS-ENDCAP		SURFACE ENDCAP		100
HIGHLINE TRACK CHANNEL - TYPE B - PRE POP						
50		HL-RR-001	1 MTR	1 MTR TRACK CHANNEL		2625
51		HL-RR-002	2 MTR	2 MTR TRACK CHANNEL		5250
52		HL-RR 600 CURVE	Ø 600MM	PRE POP CURVE ARCS		4070
53		HL-RR-CJ	-	PRE POP CORNER JOINTER		1000
54		HL-RR-JOINTER	-	TRACK JOINTER		140
55		HL-RR-ENDCAP		RECESSED ENDCAPS		100

HIGHLINE COMMON ACCESSORIES

56		HL-AC-PA	WIRE LENGTH 1.5 MTR	POWER ADAPTOR		540
57		HL-AC-CA	MIDDLE WIRE 4.5CM	CORNER ADAPTOR		800
58		HL-AC-SA	-	STRAIGHT ADAPTOR		600

HIGHLINE LIGHTS - DALI DIMMABLE + TUNABLE (48V POWER SUPPLY EXTERNAL)

S. NO.	IMAGE	PRODUCT CODE & NAME	CCT	DESCRIPTION		MRP
59		HL-B-10W- DDT (45MM*10 0MM)	DALI DIMMABL E + TUNABLE	TRACK SPOT 90° TILTABLE + 355° ROTATEABLE		7530
60		HL-B-18W- DDT (60MM*12 5MM)	DT8	BEAM : 24°		8310
61		HL-E-8W- DDT (L: 300MM)	DALI DIMMABL E + TUNABLE DT8	LINEAR DIFFUSED BEAM : 100°		5770
62		HL-E-16W- DDT (L:600MM)				6904
63		HL-E-24W- DDT (L:900MM)				8090
64		HL-F-10W- DDT (L:195MM)	DALI DIMMABL E + TUNABLE DT8	LINEAR FIXED SPOT BEAM : 30°		6660
65		HL-F-15W- DDT (L: 307MM)				7876
66		HL-F-20W- DDT (L: 388MM)				8674
67		HL-G-10W- DDT (L : 195MM)	DALI DIMMABL E + TUNABLE DT8	ADJUSTABLE LINEAR SPOT TILTABLE 180° BEAM : 30°		8610

HIGHLINE LIGHTS - SINGLE CCT (48V POWER SUPPLY EXTERNAL)						
68		HL-B-5W (35MM*80MM)	3K / 4K	TRACK SPOT 90° TILTTABLE + 355° ROTATEABLE BEAM : 24°		2930
69		HL-B-10W- (45MM*100MM)				3250
70		HL-B-18W (60MM*125MM)				3900
71		HL-E-8W (L: 300MM)	3K / 4K	LINEAR DIFFUSED BEAM : 100°		2060
72		HL-E-16W (L:600MM)				2900
73		HL-E-24W (L:900MM)				4100
		HL-F-5W (L:113MM)	3K / 4K	LINEAR FIXED SPOT BEAM : 30°		2150
74		HL-F-10W (L:195MM)				2600
75		HL-F-15W (L: 307MM)				3530
76		HL-F-20W (L: 388MM)				4050
77		HL-G-5W (L : 113MM)	3K / 4K	ADJUSTABLE LINEAR SPOT TILTTABLE 180° BEAM : 30°		3050
78		HL-G-10W (L : 195MM)	3K / 4K			4200

HIGHLINE
Installation
method



HL-RR Embedded sealing plate
HL-SS open-Frame

10mm

HL-RR



HL-SS

TRACK



COLORS
 BK

MODEL NO.	Input	Material	Size(mm)
HDT-1M	DC 48V	Aluminum	L1000xW50xH40mm
HDT-2M	DC 48V	Aluminum	L2000xW50xH40mm

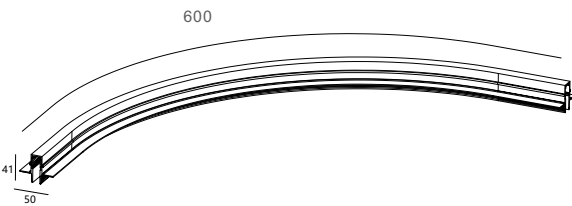


COLORS
 BK

MODEL NO.	Input	Material	Size(mm)
HST-1M	DC 48V	Aluminum	L1000xW17xH26mm
HST-2M	DC 48V	Aluminum	L2000xW17xH26mm

TRACK

H10 Series



COLORS
 BK

MODEL NO.	Input	Material	Size(mm)
HDT-600-C90	DC 48V	Aluminum	600xW50xH41mm



COLORS
 BK

MODEL NO.	Input	Material	Size(mm)
HST-900-C90	DC 48V	Aluminum	Φ900 x 550mm



ACCESSORY



HST-L02



HST-END




HST-E00



HST-E01



HST-E02



H10HT-P01




HST-C01



HDT-L02



HDT-END





HDT-C01



HDT

HIGHLINE

HL-G ADJUSTABLE LINEAR SPOT TILTABLE 180°

			LED brand: OSRAM	Size: 145 x 10.5 x 65mm	Beam angle: 30°
			CCT: 3000K/4000K	Power: 5W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Folding Grille Lamp
			Voltage & Current: 48V		

HL-G ADJUSTABLE LINEAR SPOT TILTABLE 180°

			LED brand: OSRAM	Size: 226 x 10.5 x 65mm	Beam angle: 30°
			CCT: 3000K/4000K	Power: 10W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Folding Grille Lamp
			Voltage & Current: 48V		


COLORS





Black

HIGHLINE


HL-F LINEAR FIXED SPOT

			LED brand: OSRAM	Size: 145 x 10.5 x 38mm	Beam angle: 30°
			CCT:	Power: 5W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Grille Lamp
			Voltage & Current: 48V		



HL-F LINEAR FIXED SPOT

			LED brand: OSRAM	Size: 226 x 10.5 x 38mm	Beam angle: 30°
			CCT: 3000K/4000K	Power: 10W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Grille Lamp
			Voltage & Current: 48V		

HL-F LINEAR FIXED SPOT

			LED brand: OSRAM	Size: 145 x 10.5 x 38mm	Beam angle: 30°
			CCT: 3000K/4000K	Power: 15W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Grille Lamp
			Voltage & Current: 48V		

HL-F LINEAR FIXED SPOT

			LED brand: OSRAM	Size: 226 x 10.5 x 38mm	Beam angle: 30°
			CCT: 3000K/4000K	Power: 20W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Grille Lamp
			Voltage & Current: 48V		


COLORS





Black

HIGHLINE



HL-B TRACK SPOT TILTABLE

			LED brand: OSRAM	Size: Ø 35 x 80mm	Beam angle: 15°/24°/36°
			CCT: 3000K/4000K	Power: 5W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Spotlights
			Voltage & Current: 36V 120mA		

HL-B TRACK SPOT TILTABLE

			LED brand: OSRAM	Size: Ø 45 x 100mm	Beam angle: 15°/24°/36°
			CCT: 3000K/4000K	Power: 10W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Spotlights
			Voltage & Current: 36V 250mA		

HL-B TRACK SPOT TILTABLE

			LED brand: OSRAM	Size: Ø 60 x 120mm	Beam angle: 15°/24°/36°
			CCT: 3000K/4000K	Power: 18W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Spotlights
			Voltage & Current: 36V 400mA		



COLORS





Black

HIGHLINE



HL-F LINEAR FIXED SPOT

			LED brand: SANAN	Size: 330 x 10.5 x 38mm	Beam angle: 100°
			CCT: 2700K/3000K/4000K/5000K	Power: 8W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Floodlights
			Voltage & Current: 48V		

HL-F LINEAR FIXED SPOT

			LED brand: SANAN	Size: 630 x 10.5 x 38mm	Beam angle: 100°
			CCT: 2700K/3000K/4000K/5000K	Power: 16W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Floodlights
			Voltage & Current: 48V		

HL-E LINEAR DIFFUSED

			LED brand: SANAN	Size: 630 x 10.5 x 38mm	Beam angle: 100°
			CCT: 3000K/4000K	Power: 24W	CRI: Ra>90
			Input(V): DC48V	Material: Aluminium	Description: Floodlights
			Voltage & Current: 48V		







H10 Series