

35%

DISCOUNT
ON THE LIST
PRICE

PRICELIST W.E.F 27.11.25

MICROLINE 5MM MAGNETIC TRACK LIGHTING SYSTEM

TRACK CHANNELS AND ACCESSORIES

S. NO.	IMAGE	PRODUCT CODE & NAME	SIZE	DESCRIPTION	MRP
MICROLINE TRACK CHANNEL - TYPE A - SURFACE / HANGING					
1		ML-SS-001	1 MTR	1 MTR TRACK CHANNEL	1540
2		ML-SS-002	2 MTR	2 MTR TRACK CHANNEL	3080
3		ML-SS 300 CURVE	Ø 300MM	SURFACE CURVE ARCS	2856
4		ML-SS 600 CURVE	Ø 600MM		3308
5		ML-SS 900 CURVE	Ø 900MM		4456
6		ML-SS 1200 CURVE	Ø 1200MM		5856
7		ML-SS-CJ	-	SURFACE CORNER JOINTER	611
8		ML-SS-JOINTER	-	TRACK JOINTER	71
9		ML-SS-HG KIT	-	SUSPENSION KIT	930
MICROLINE TRACK CHANNEL - TYPE B - PRE POP					
10		ML-RR-001	1 MTR	1 MTR TRACK CHANNEL	1800
11		ML-RR-002	2 MTR	2 MTR TRACK CHANNEL	3600
12		ML-RR 600 CURVE	Ø 600MM	PRE POP CURVE ARCS	2800
13		ML-RR 900 CURVE	Ø 900MM		2996
14		ML-RR 1200 CURVE	Ø 1200MM		3984
15		ML-RR-CJ	-	PRE POP CORNER JOINTER	817
16		ML-RR-JOINTER	-	TRACK JOINTER	111
MICROLINE TRACK CHANNEL - TYPE C - POST POP					
17		ML-RC-001	1 MTR	1 MTR TRACK CHANNEL	2200
18		ML-RC-002	2 MTR	2 MTR TRACK CHANNEL	4400

S. NO.	IMAGE	PRODUCT CODE & NAME	CCT	DESCRIPTION	MRP
19		ML-RC-CJ	-	POST POP CORNER JOINTER	817
20		ML-RC-JOINTER	-	TRACK JOINTER	111
MICROLINE COMMON ACCESSORIES					
21		ML-AC-PA	WIRE LENGTH 1.5 MTR	POWER ADAPTOR	777
22		ML-AC-CA	MIDDLE WIRE 4.5CM	CORNER ADAPTOR	970
23		ML-AC-SA	-	STRAIGHT ADAPTOR	738
24		ML-ENDCAP	-	END CAPS	54
MICROLINE MAGNETIC LIGHTS (INPUT 24V DC)					
S. NO.	IMAGE	PRODUCT CODE & NAME	CCT	DESCRIPTION	MRP
25		ML-A-8W LENGTH : 1000MM	3K / 4K	SILICON FLEX LIGHT (USE CLIP TO FIX AND INSTALL THE PRODUCT) (PRODUCT DELICATE)	3660
26		ML-B-5W (60MM*35MM)	3K / 4K	TRACK SPOT 180° TILTABLE ROTATEABLE	3005
27		ML-B-9W (65MM*40MM)			3170
28		ML-C-5W (45MM*60MM)	3K / 4K	SURFACE SPOT FIXED SPOT	3195
29		ML-D-12W (DIA:115MM)	3K / 4K	DOWNLIGHT BEAM : 120°	4138
30		ML-D-18W (DIA:140MM)			4750
31		ML-E-8W (L: 300MM)	3K / 4K	LINEAR DIFFUSED BEAM : 120°	2068
32		ML-E-16W (L:600MM)			3100
33		ML-E-21W (L:900MM)			3880
34		ML-F-6W (L:100MM)	3K / 4K	FIXED LINEAR SPOT	2280
35		ML-F-10W (L:200MM)			3010
36		ML-F-15W (L: 290MM)			3580
37		ML-F-20W (L: 390MM)			4180

S. NO.	IMAGE	PRODUCT CODE & NAME	SIZE	DESCRIPTION	MRP
38		ML-G-6W (L : 120MM)	3K / 4K	TILTABLE LINEAR SPOT	2990
39		ML-G-12W (L:230MM)			3900
40		ML-H-5W L: 300MM	3K / 4K	CONCEALED LINEAR DIFFUSED	2110
41		ML-I-3W (200MM*35MM)	3K	HANGING LIGHT (BLACK BODY)	2920
MICROLINE INBUILT POWER SUPPLY					
42		ML-IB-100W	-	POWER SUPPLY 100W	3150

Mini magnet track





Mini
magnet track

E x t r e m e l y

s l i m

d e s i g n



E x t r e m e l y

s l i m

d e s i g n





Mini **magnet track**



Multiple linking methods
can be used in combination

and creativity
can be created by you


WRT

WDT

WST

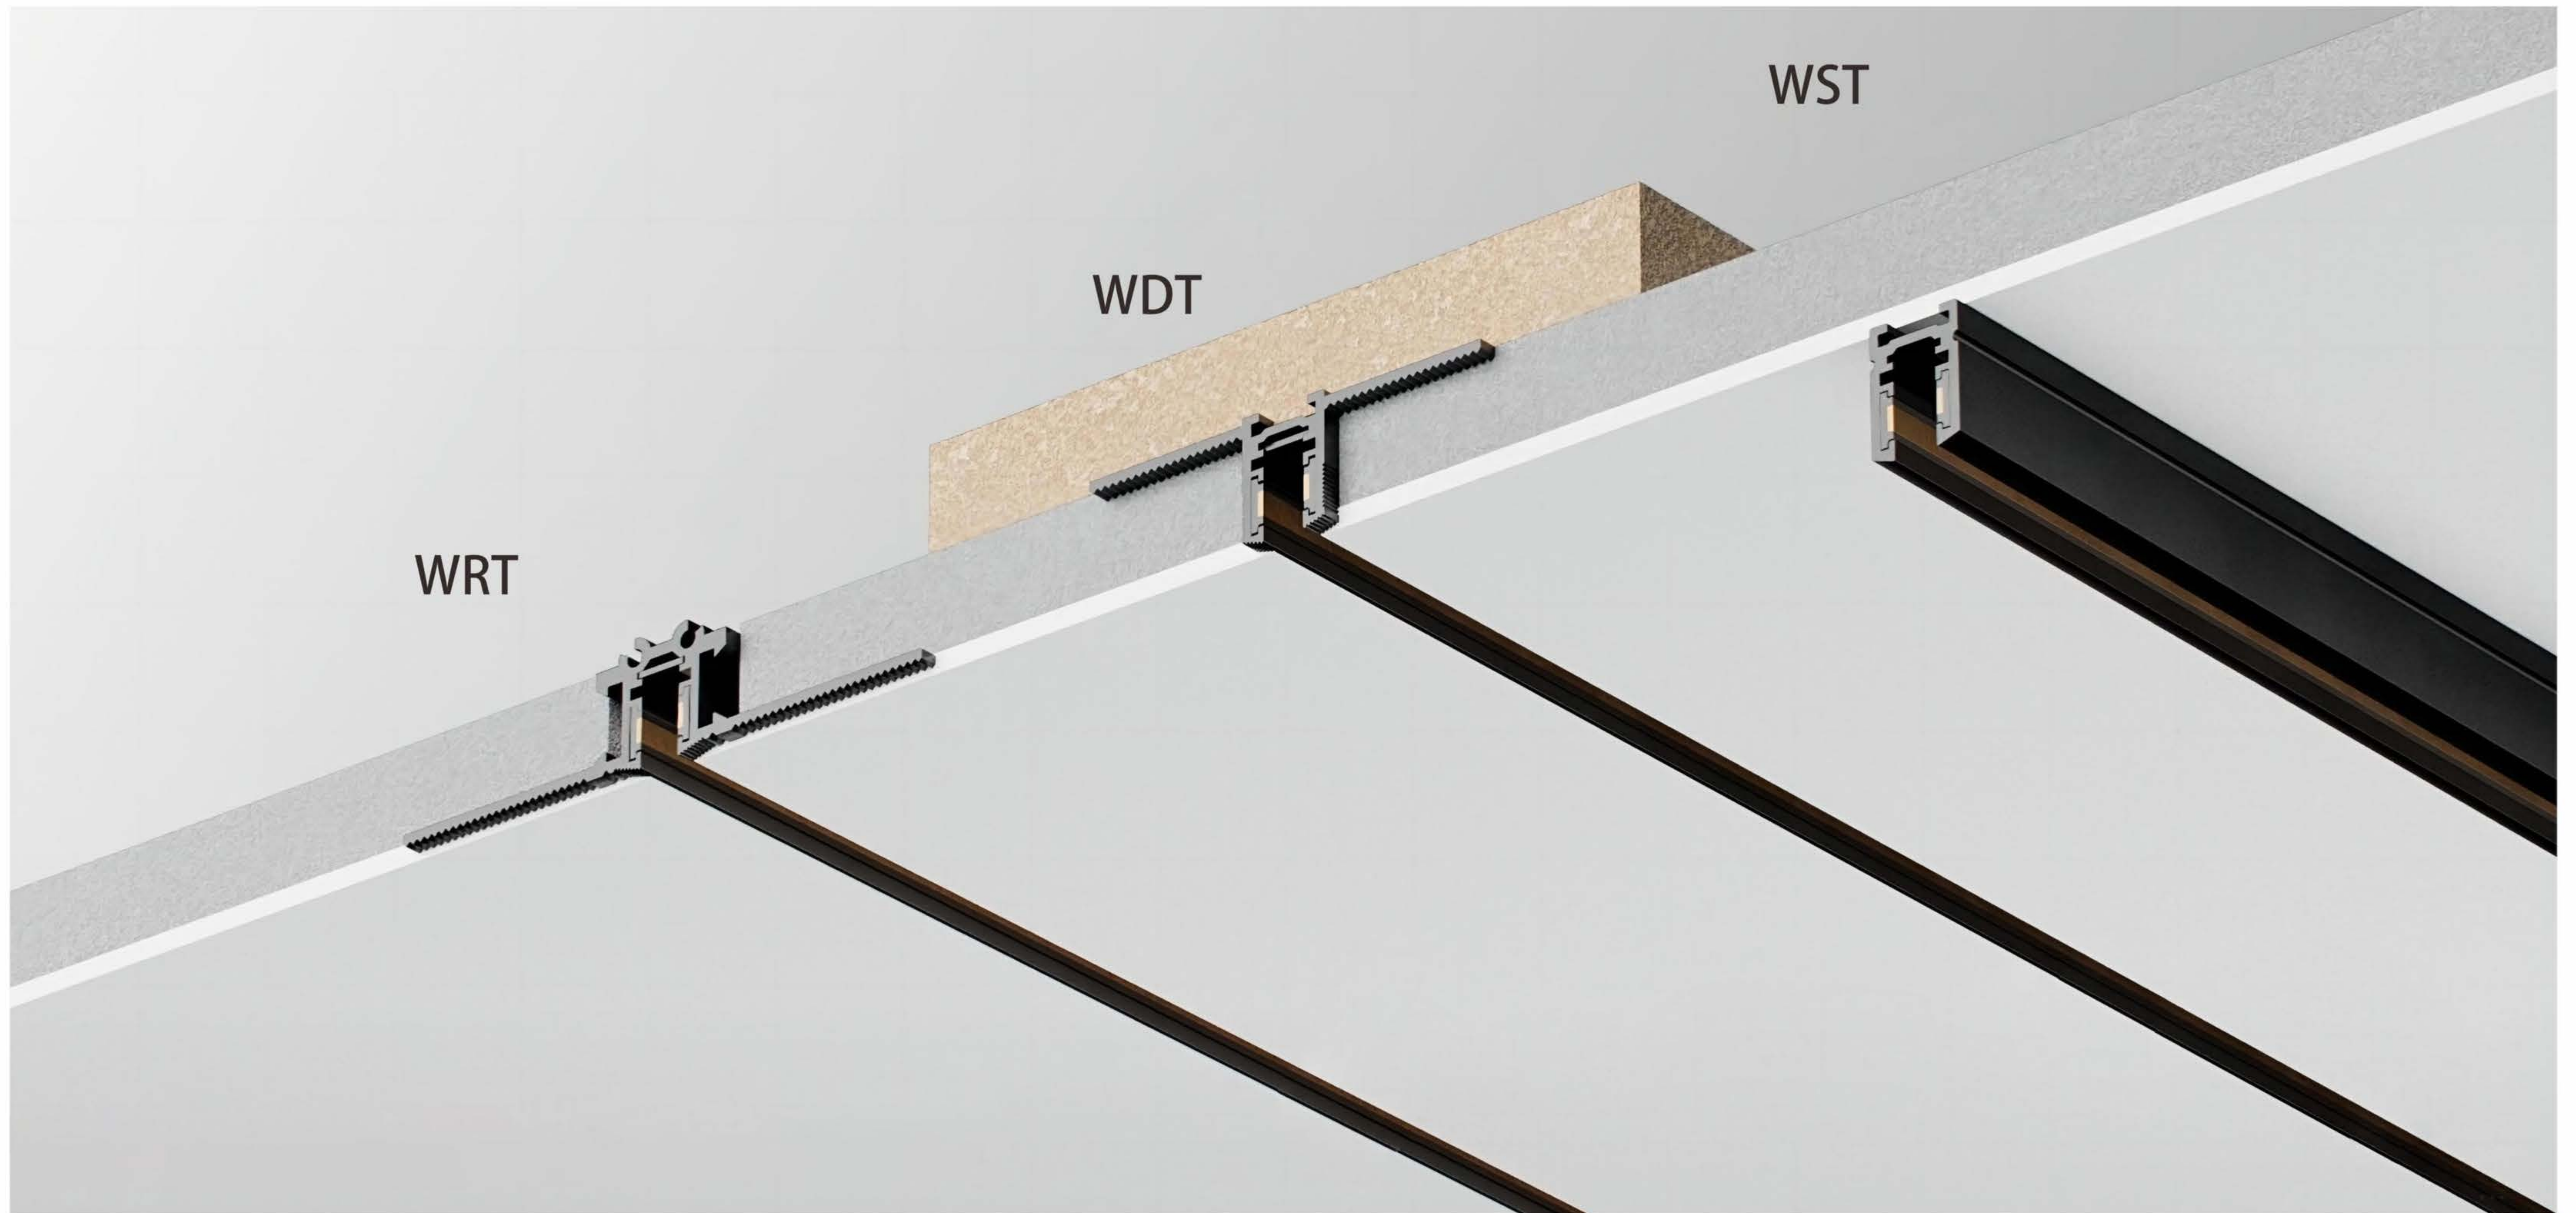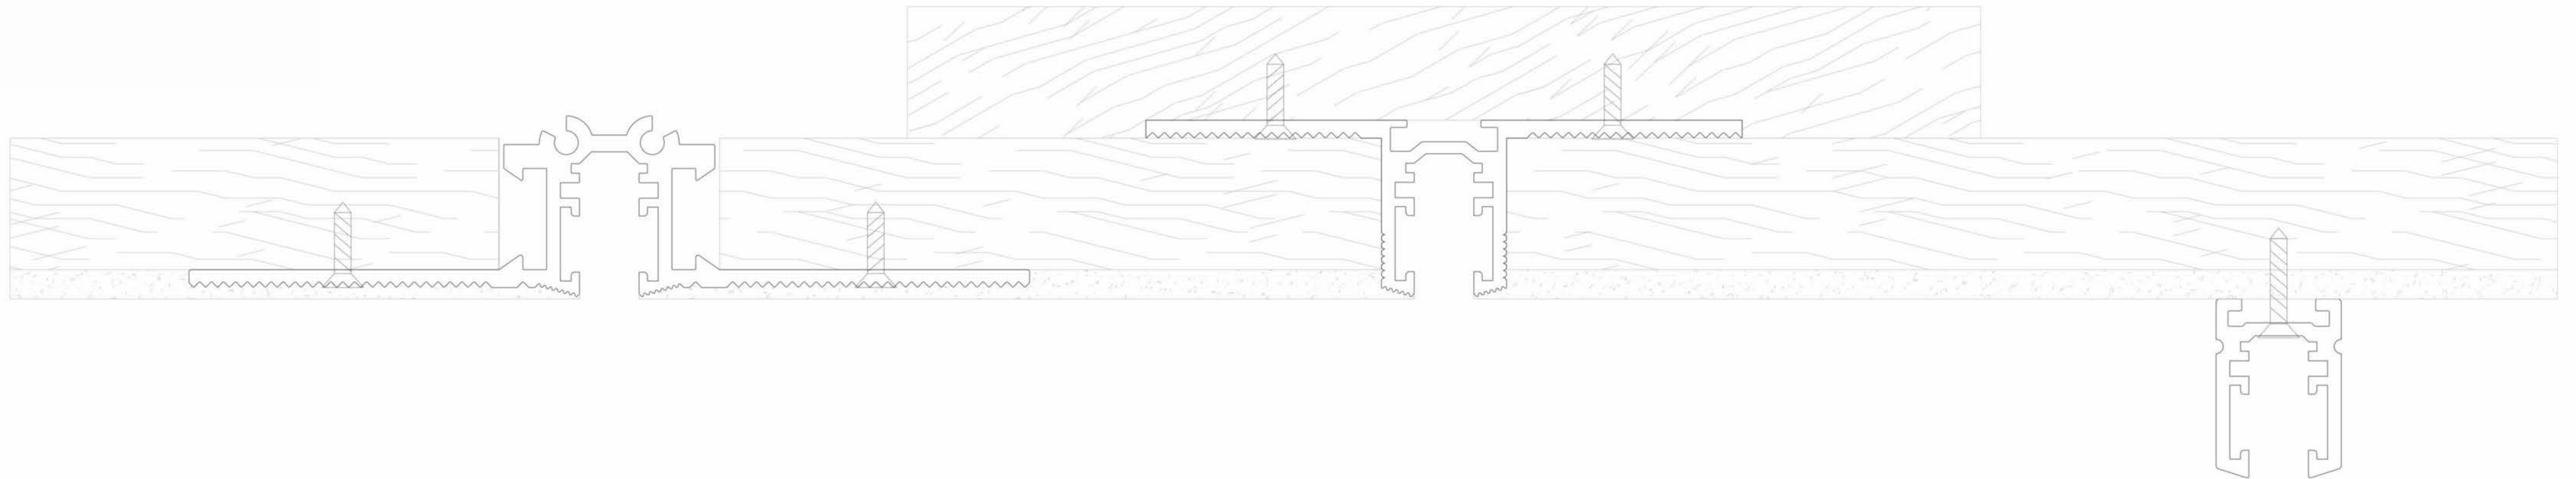


WRT Track (Flush mounting)

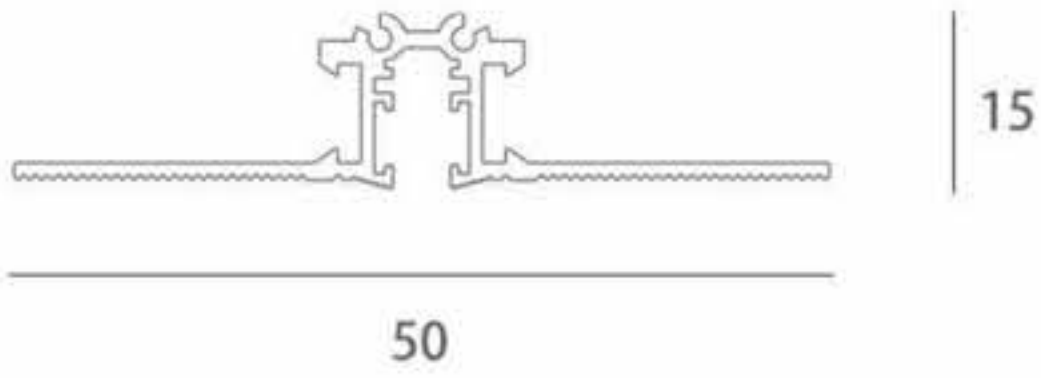


Type	Electrical parameters	Maximum current	Length(mm)
WRT-2M	DC 24V	4A max	2000

WDT Track (CLAMP PIATE)

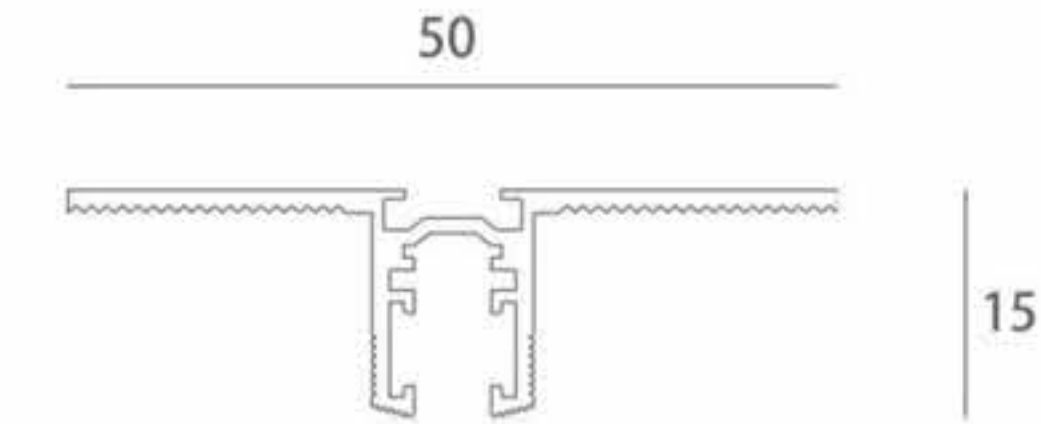

Type	Electrical parameters	Maximum current	Length(mm)
WDT-2M	DC 24V	4A max	2000

WST Track (Surface mounting)

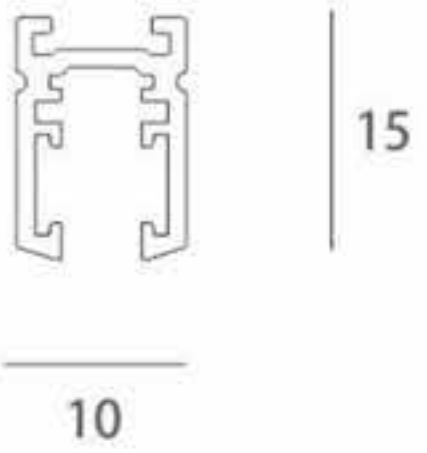


Type	Electrical parameters	Maximum current	Length(mm)
WST-2M	DC 24V	4A max	2000


ACCESSORY




WRT-L01

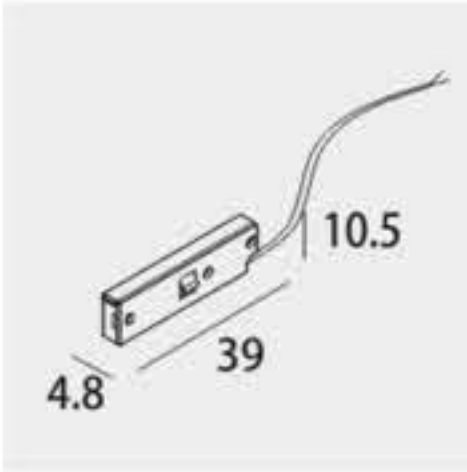

WT-E01-P

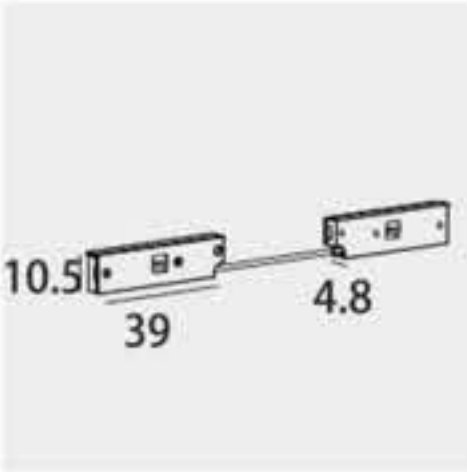


WT-E02

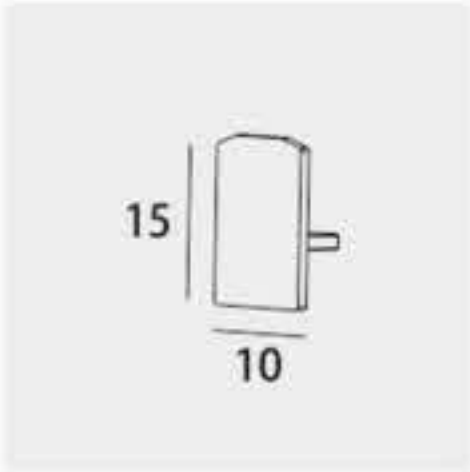


WT-END



WRT-C01

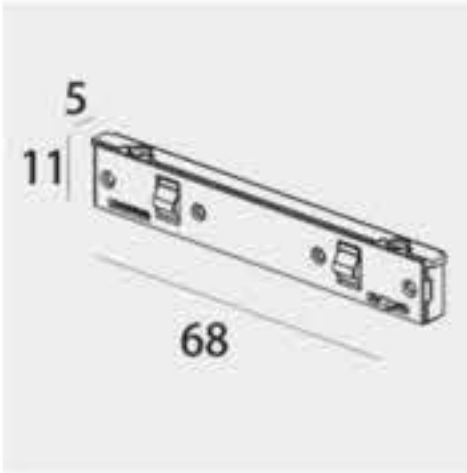


WT-E04

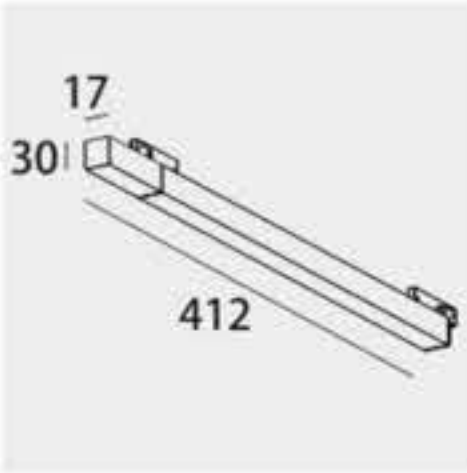

WT0524100W



WDT-L01

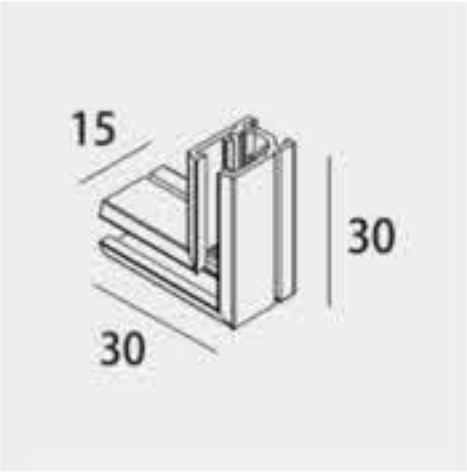

WST-L02




WST-C01




WST-P01


WDT Track (CLAMP PLATE)

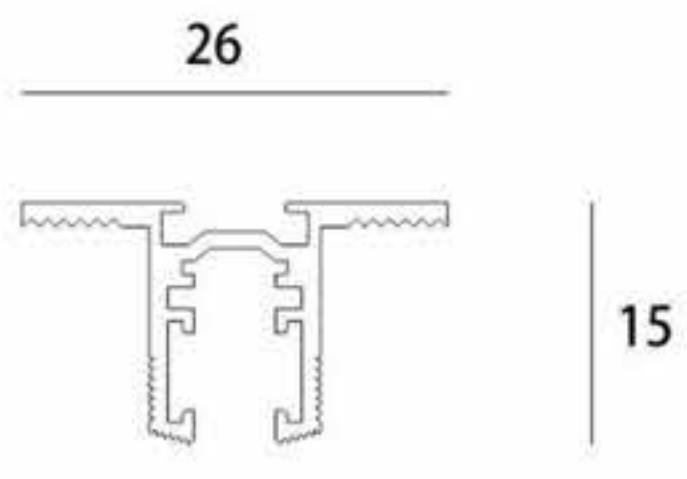


Type	Electrical parameters	Maximum current	Length(mm)
WDT-R600Q	DC 24V	4A max	Φ 600
WDT-R900Q	DC 24V	4A max	Φ 900
WDT-R1200Q	DC 24V	4A max	Φ 1200

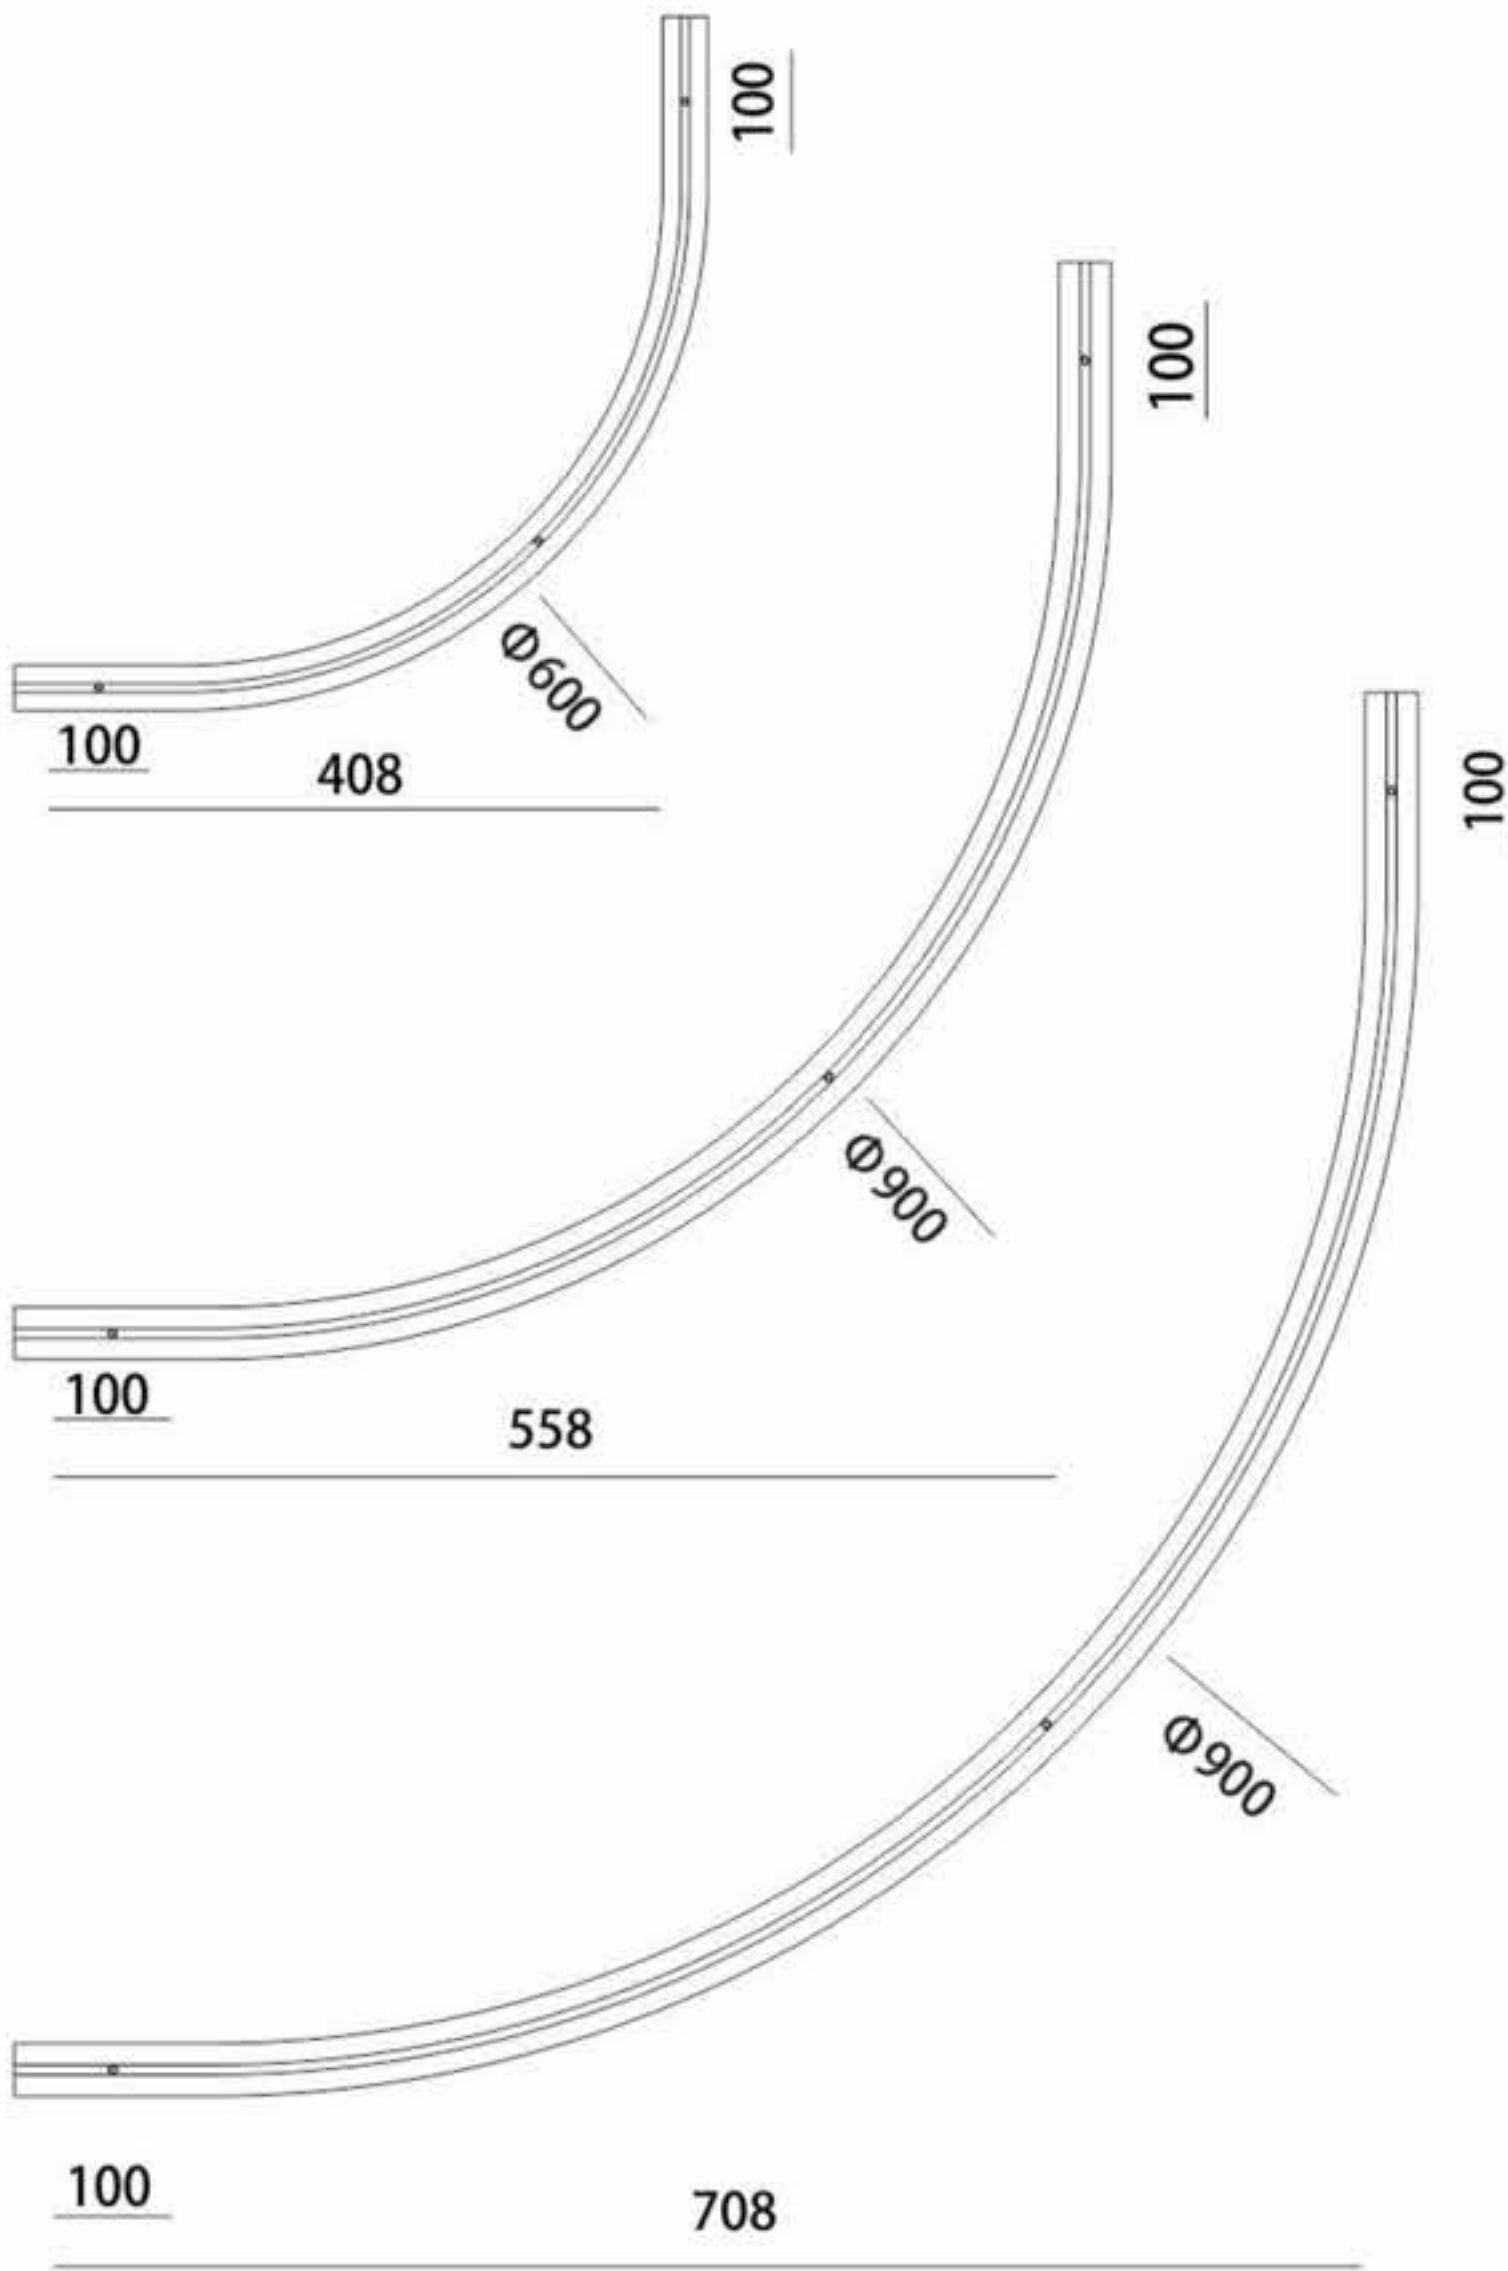

WST Track (Surface mounting)

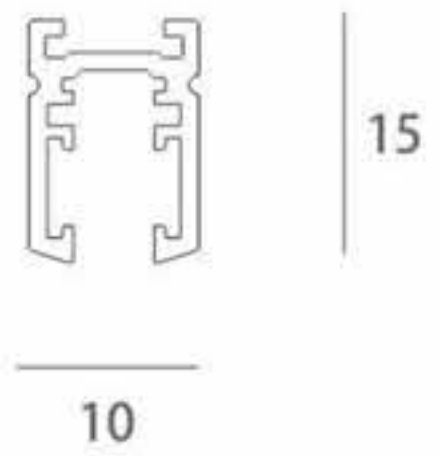


Type	Electrical parameters	Maximum current	Rounded corners
WST-R300Q	DC 24V	4A max	Φ 300
WST-R600Q	DC 24V	4A max	Φ 600
WST-R900Q	DC 24V	4A max	Φ 900
WST-R1200Q	DC 24V	4A max	Φ 1200

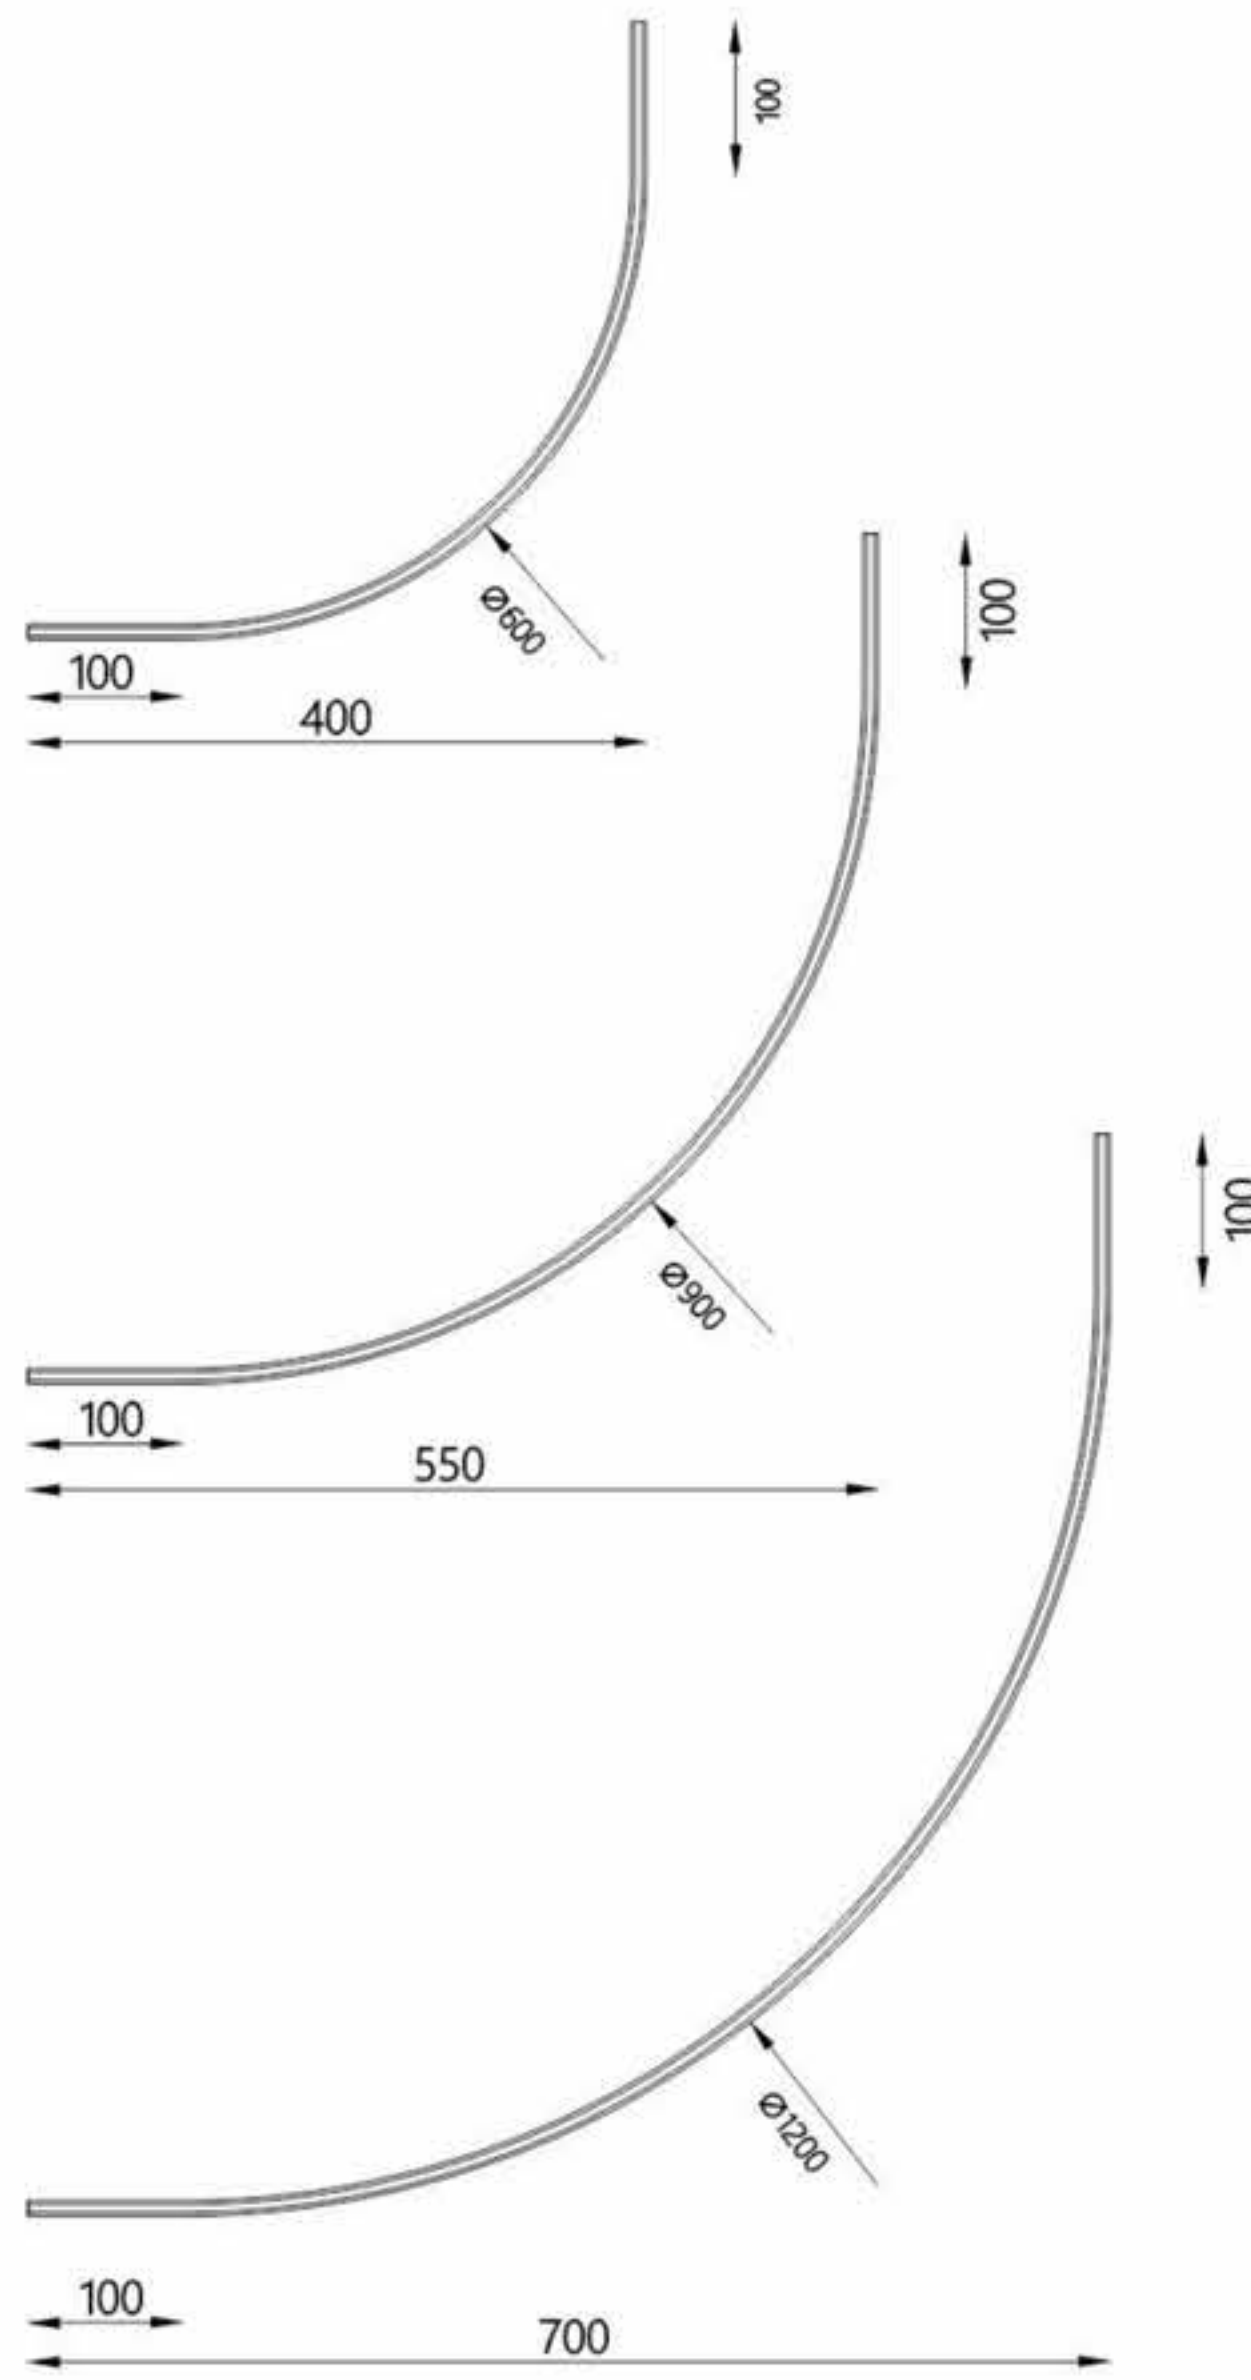


WOT Track (Surface mounting)




Type	Electrical parameters	Maximum current	Length(mm)
WOT-R600Q	DC 24V	4A max	Φ 600
WOT-R900Q	DC 24V	4A max	Φ 900
WOT-R1200Q	DC 24V	4A max	Φ 1200

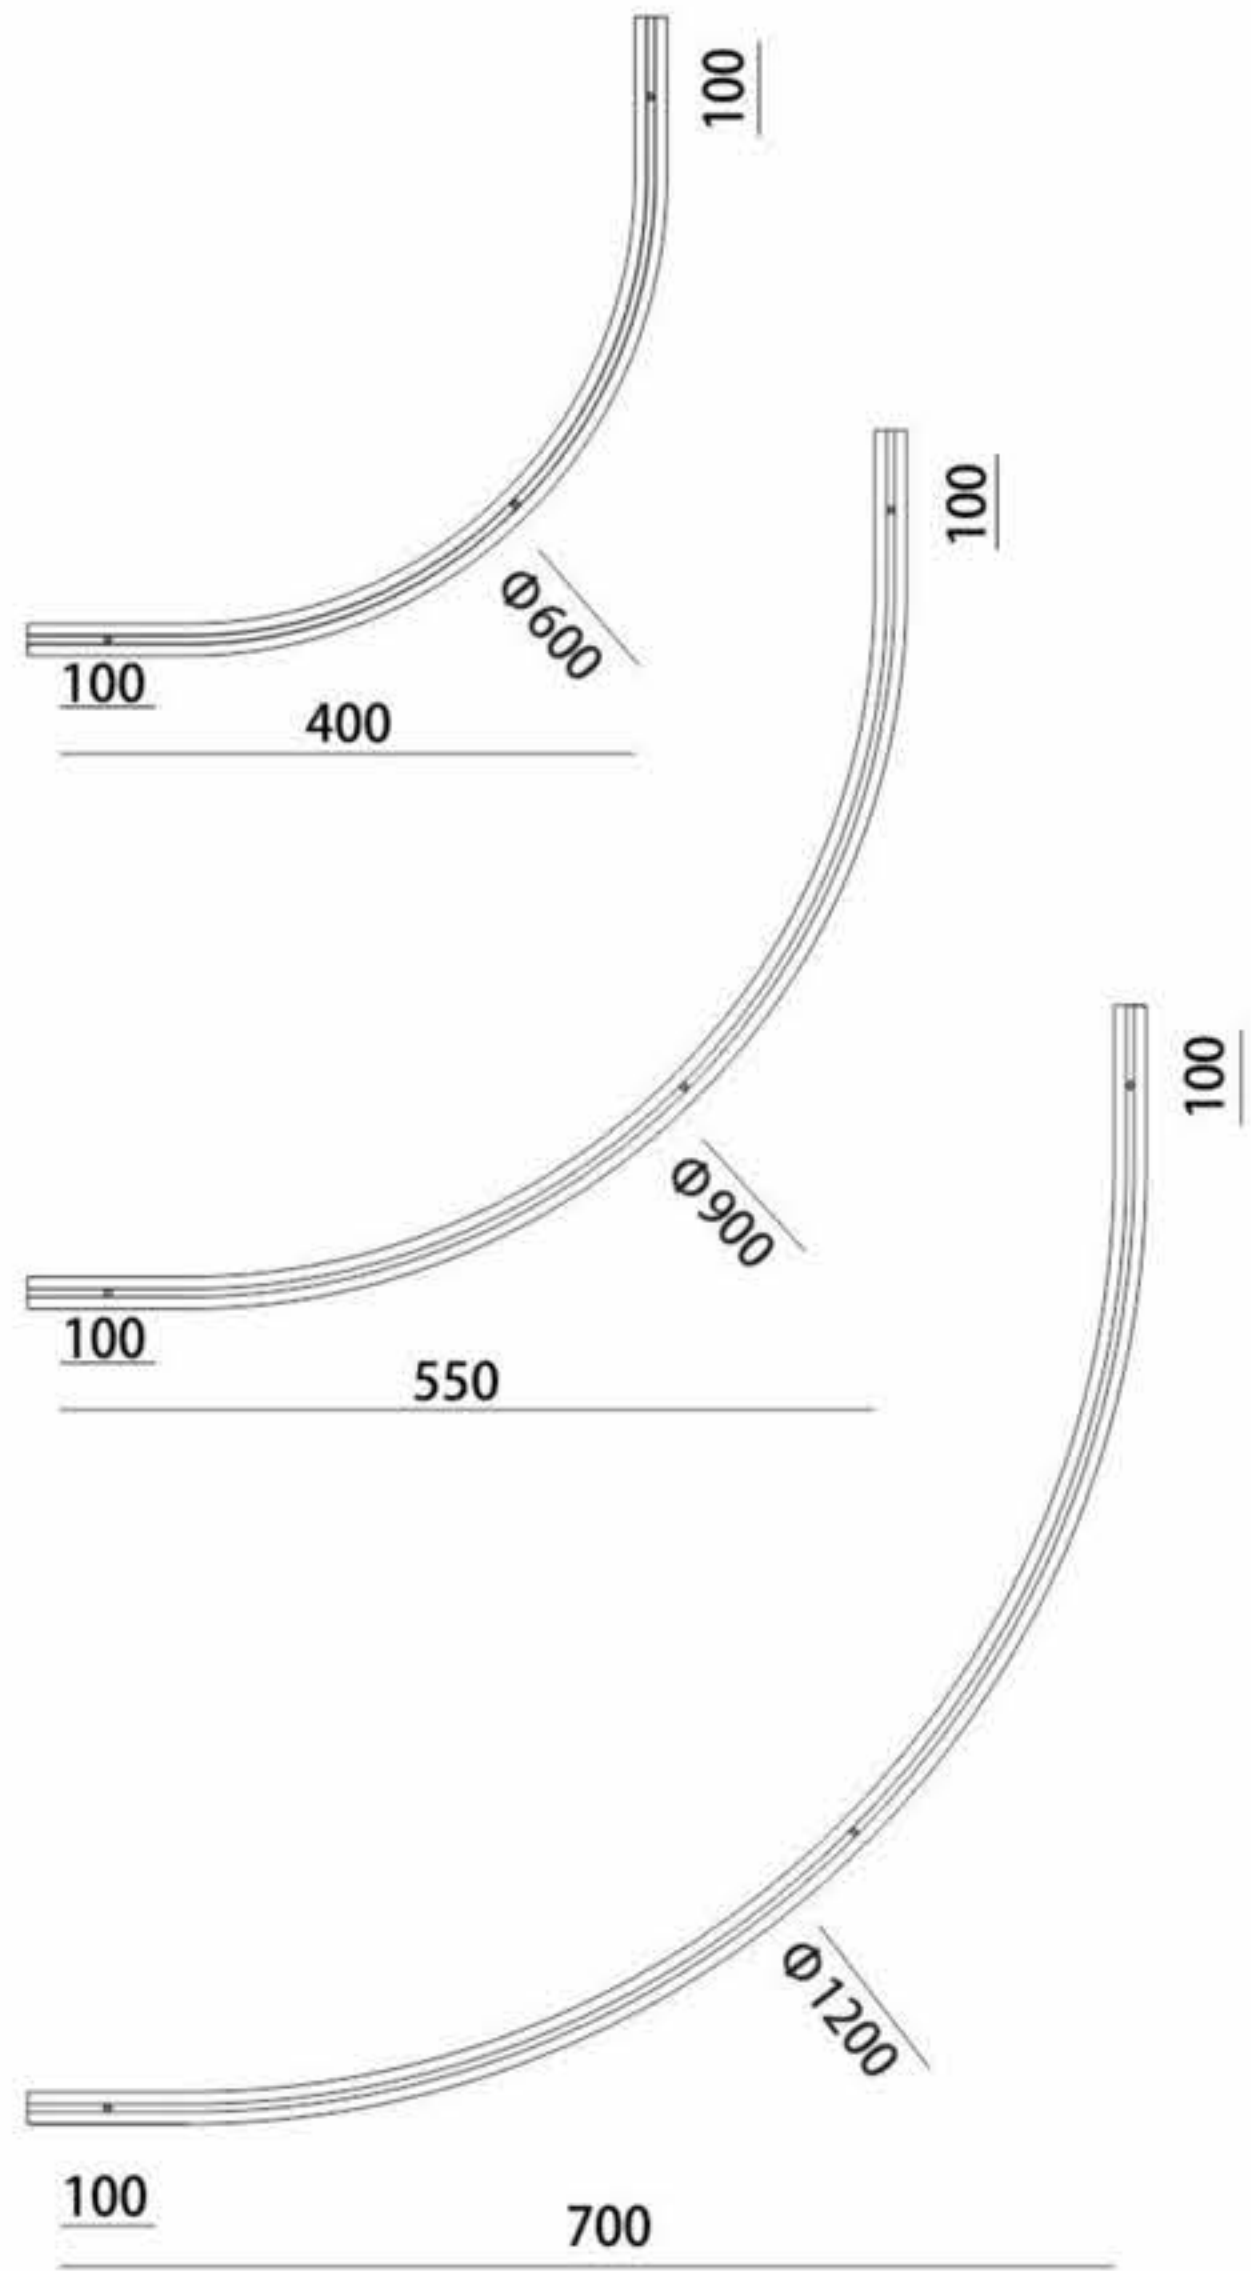

WOT Track (Surface mounting)

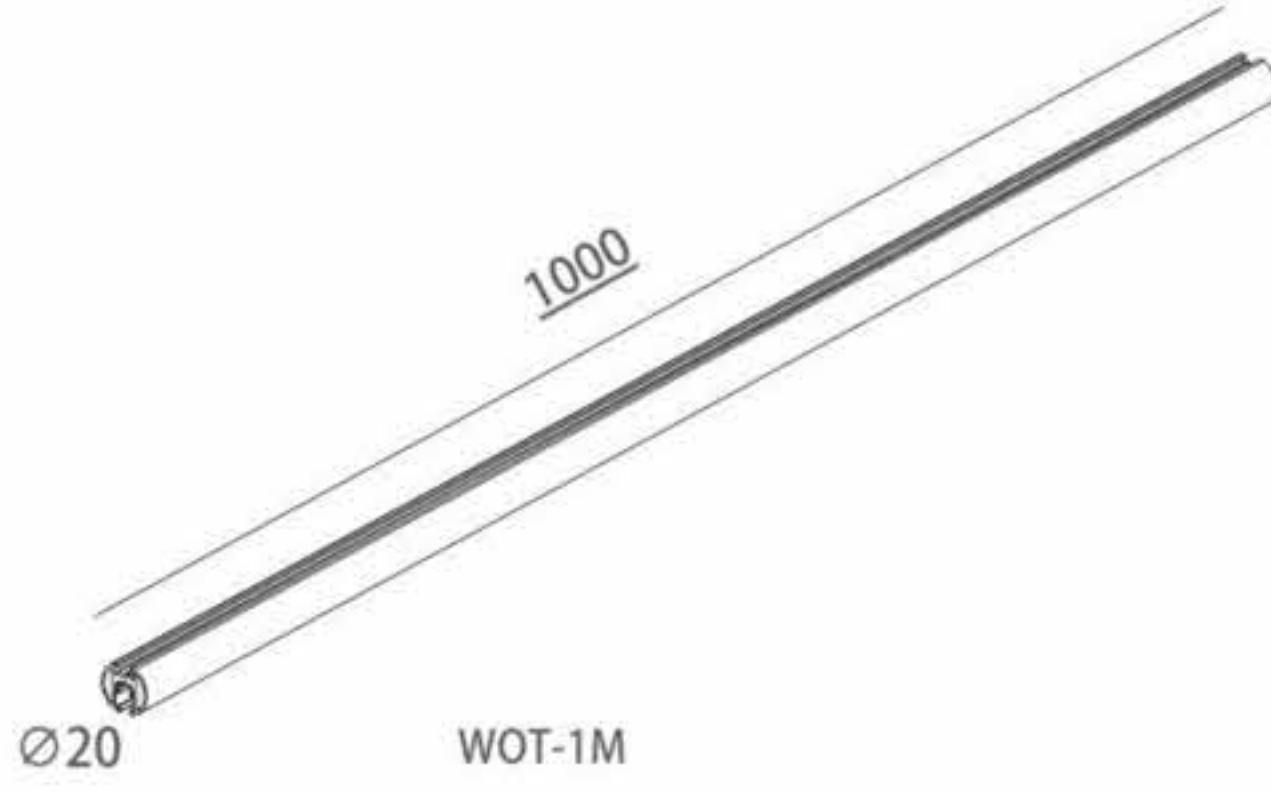

Type	Electrical parameters	Maximum current	Length(mm)
WOT-1M	DC 24V	4A max	1000

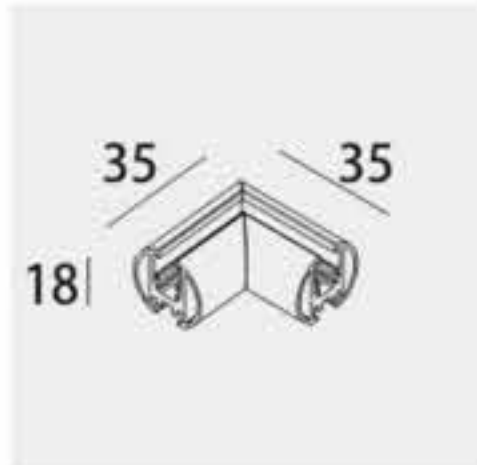


WOT-L01



WOT-END



WOT-B01

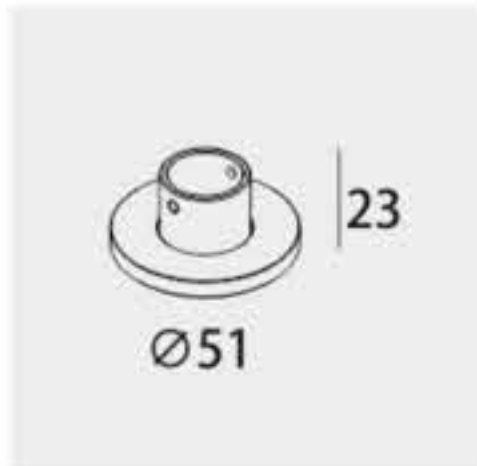


WOT-B02



POWER ADAPTER



WOT-E01

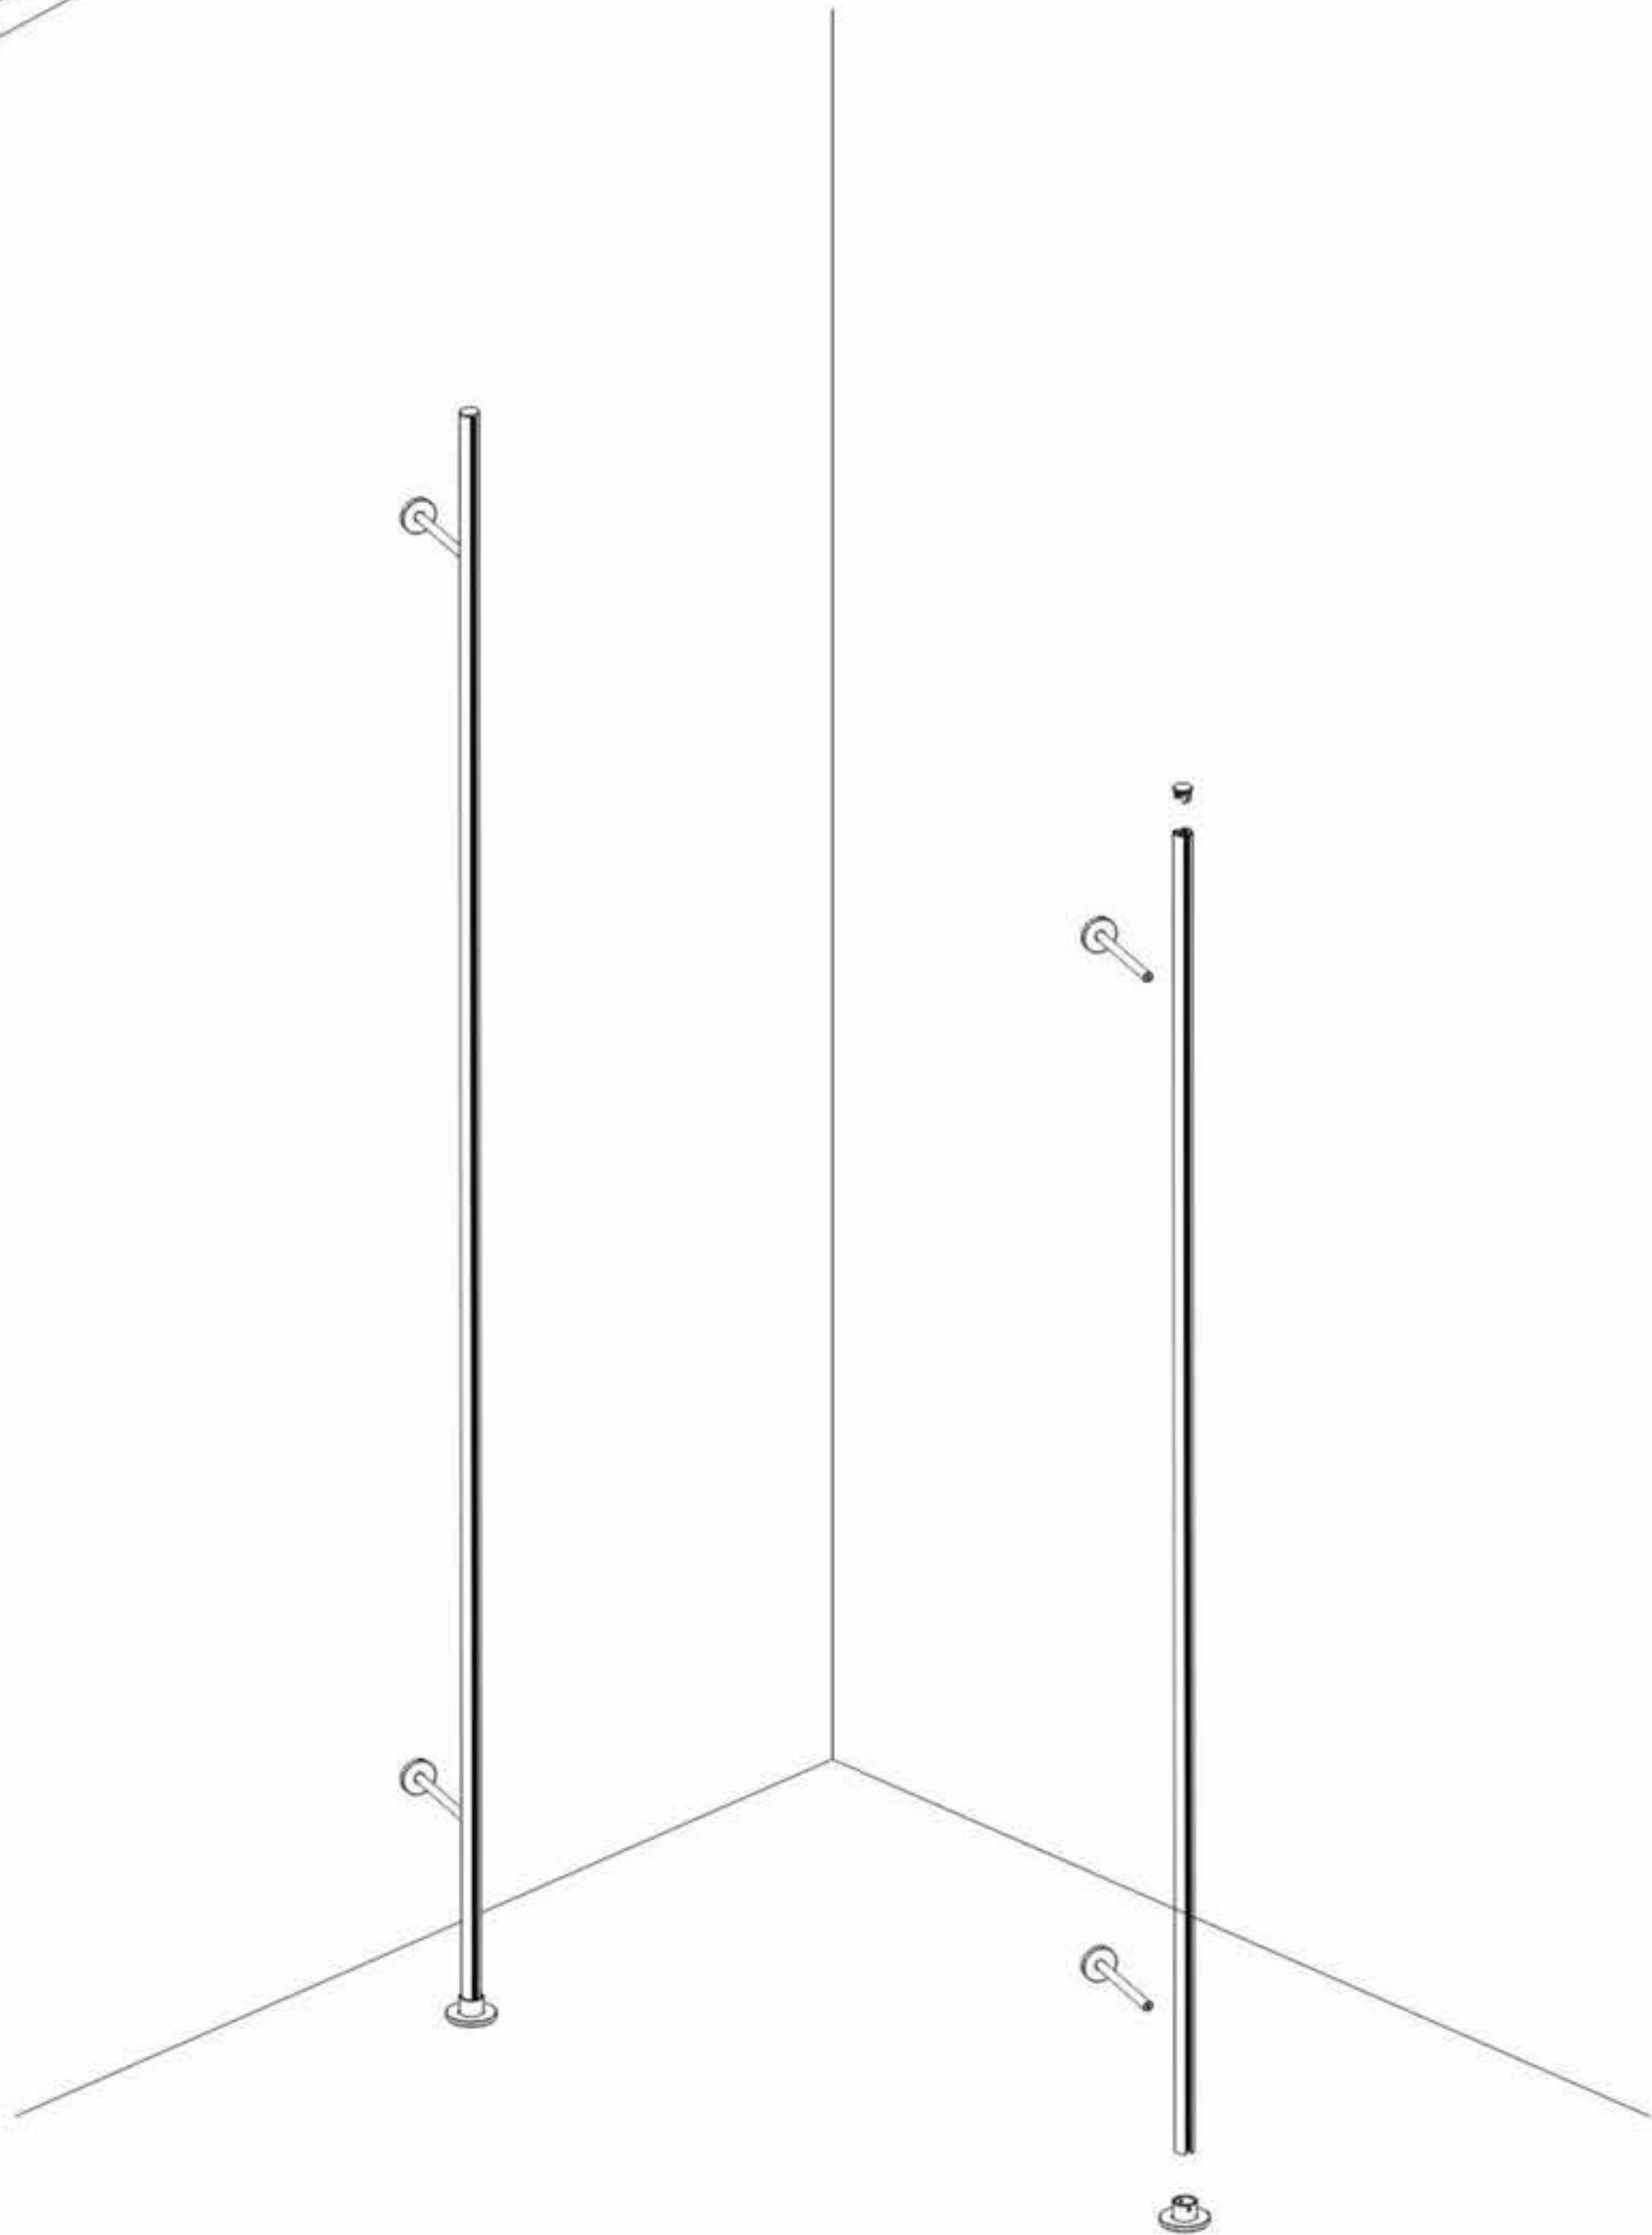


Mini
magnet track





W05MAGNETSYSTEMseries

WSA0535DR

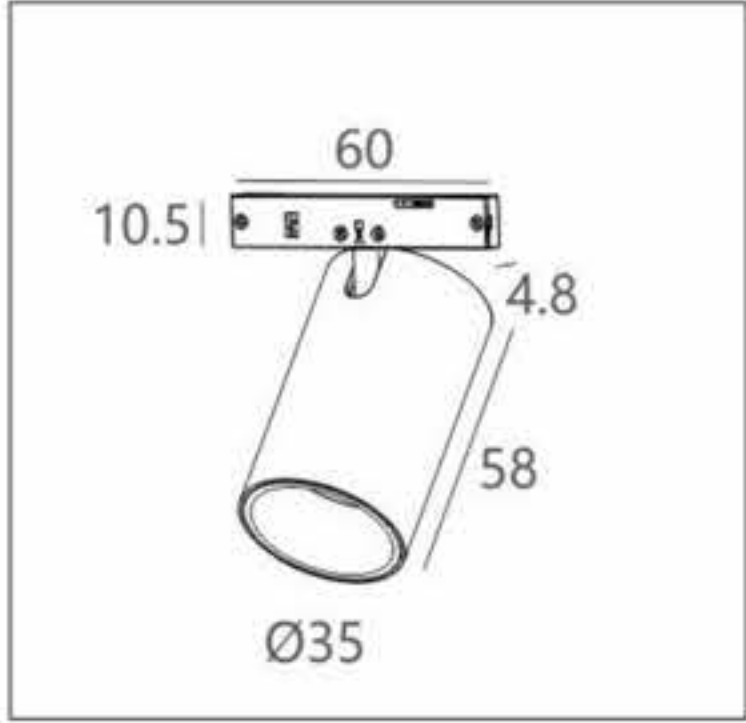





LightSource:
Bridgelux

Luminousflux:
500lm

CRI:
Ra>90

CCT:
3000K/4000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
500mA

OPTIC:
24°


Mainsvoltage:
DC24V

Description:
Magnetic rail spotlight

Colors:

BK

WSA0545DR

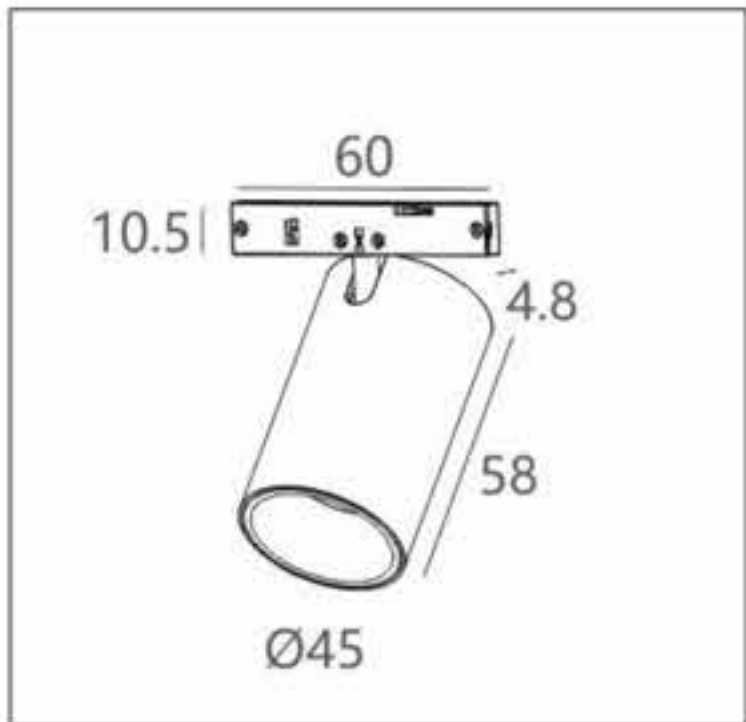





LightSource:
Bridgelux

Luminousflux:
700lm

CRI:
Ra>90

CCT:
3000K/4000K

Material:
Aluminum

Power:
9W

Outputvoltage:
18V

Outputcurrent:
400mA

OPTIC:
24°

Mainsvoltage:
DC24V

Description:
Magnetic rail spotlight

Colors:

BK

Mini
magnet track



Mini
magnet track



E x t r e m e l y

s l i m

d e s i g n

W05MAGNETSYSTEMseries

WWA0560NR-B

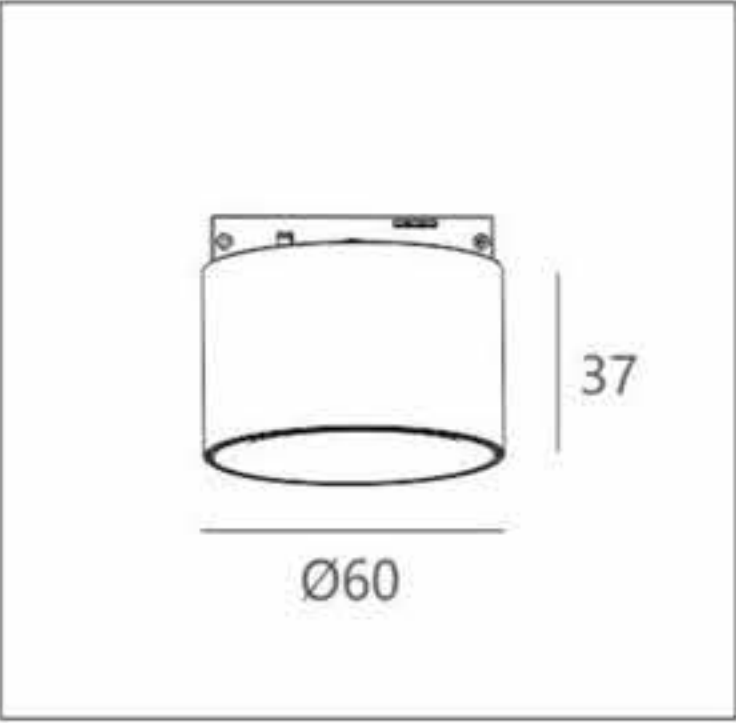

LightSource:
Bridgelux

Luminousflux:
450lm

CRI:
Ra>90

CCT:
3000K/4000K

Material:
Aluminum

Power:
5W

Outputvoltage:
9V

Outputcurrent:
450mA

OPTIC:
24°

Mainsvoltage:
DC24V

Description:
Magneticsuction

Colors:
●
BK



Mini
magnet track





W05MAGNETSYSTEMseries

WWB0513NR

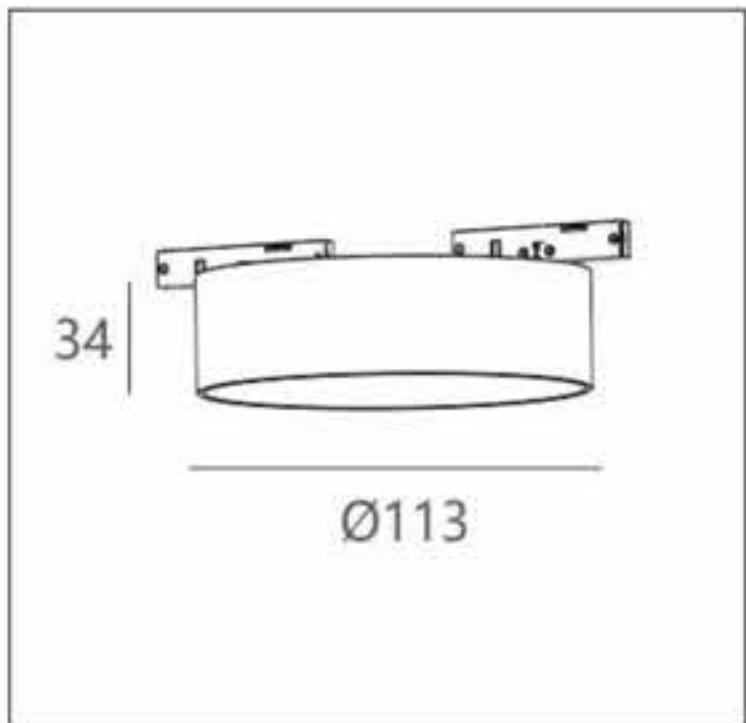

LightSource:
SANAN

Luminousflux:
700lm

CRI:
Ra>80

CCT:
3000K/4000K

Material:
Aluminum

Power:
12W

Outputvoltage:
24V

Colors:

BK

OPTIC:
100°

Mainsvoltage:
DC24V

Description:
Magneticsuction


Mini
magnet track






W05MAGNETSYSTEMseries

WLB1030NS

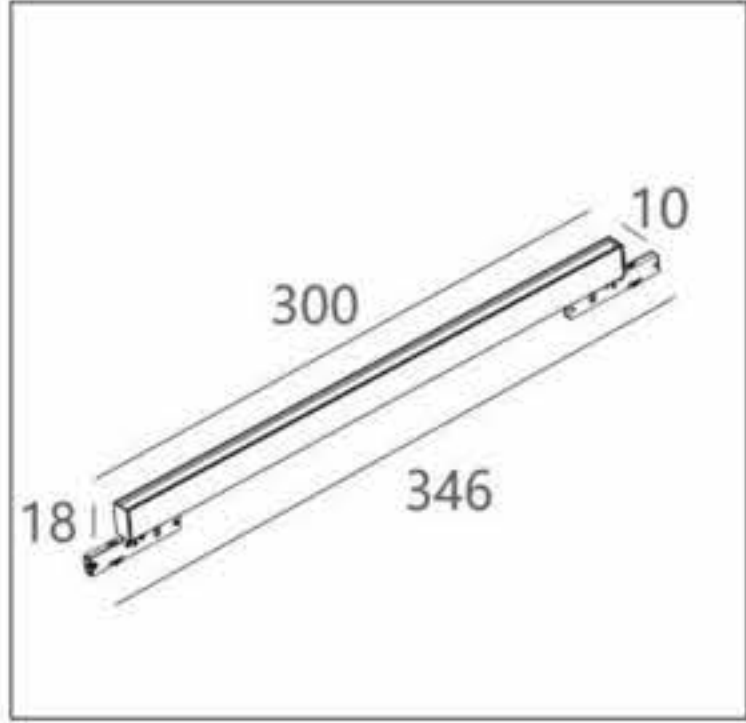		 High CRI	 IP20	LightSource: SANAN	Material: Aluminum	OPTIC: 100°
				Luminousflux: 700lm	Power: 8W	Mainsvoltage: DC24V
				CRI: Ra> 80	Outputvoltage: 24V	Description: Magneticsuction
				CCT: 3000K/4000K	Colors:	
					 BK	

WLB1060NS

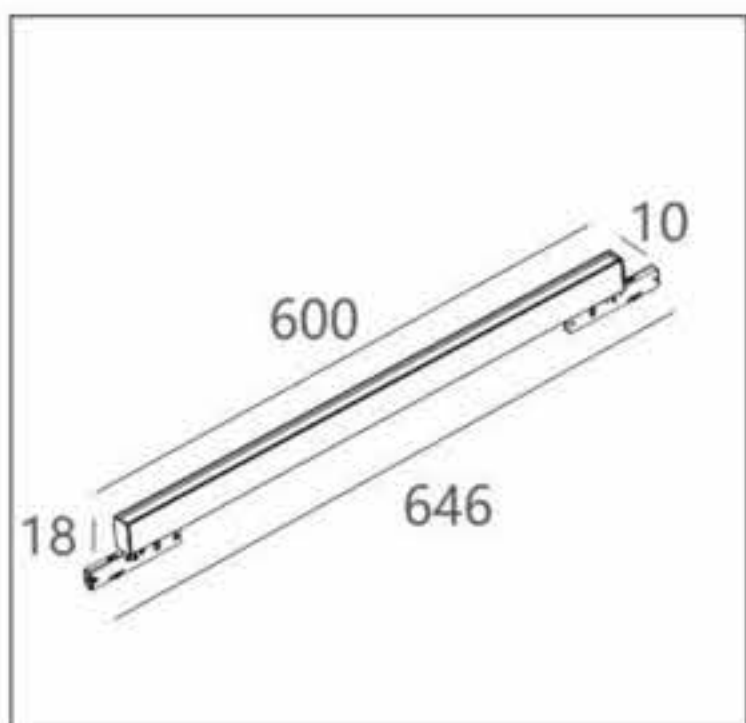
		 High CRI	 IP20	LightSource: SANAN	Material: Aluminum	OPTIC: 100°
				Luminousflux: 1300lm	Power: 16W	Mainsvoltage: DC24V
				CRI: Ra> 80	Outputvoltage: 24V	Description: Magneticsuction
				CCT: 3000K/4000K	Colors:	
					 BK	


Mini magnet track



W05MAGNETSYSTEMseries

WLA1006NS

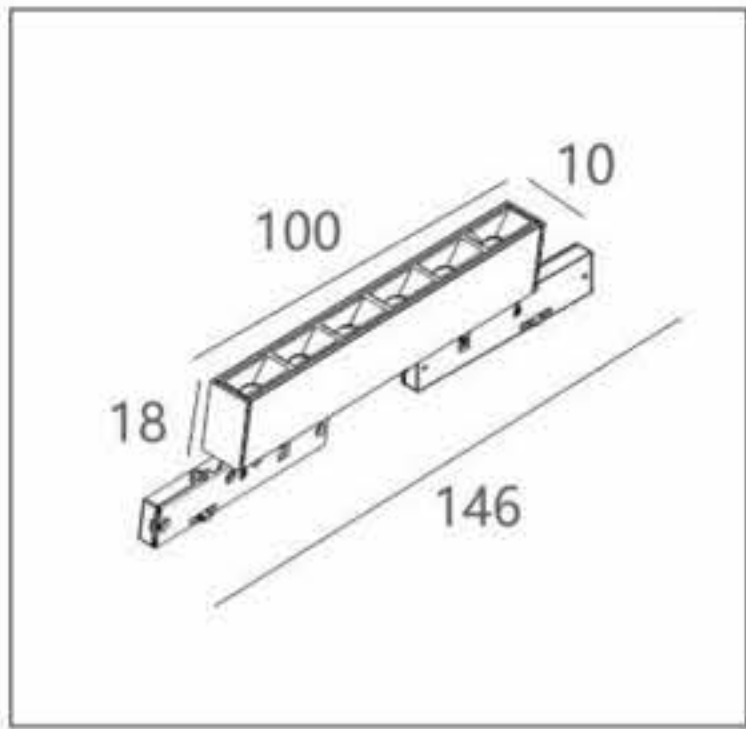



High CRI IP20

LightSource:
OSRAM

Luminousflux:
500lm

CRI:
Ra>90

CCT:
3000K/4000K

Material:
Aluminum

Power:
5W

Outputvoltage:
24V


Colors:
● BK


OPTIC:
30°

Mainsvoltage:
DC24V

Description:
Magneticsuction

WLA1012NS

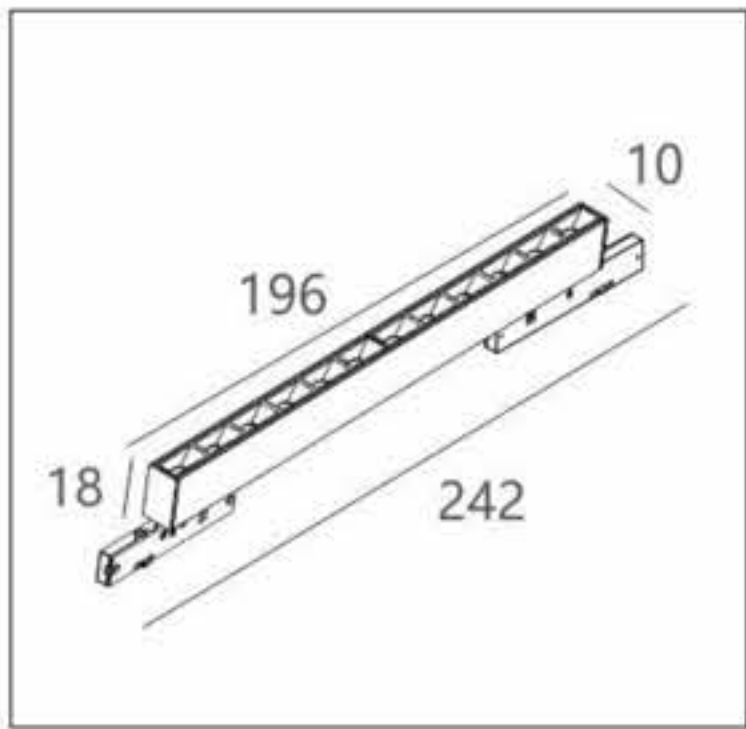



High CRI IP20

LightSource:
OSRAM

Luminousflux:
1100lm

CRI:
Ra>90

CCT:
3000K/4000K

Material:
Aluminum

Power:
10W

Outputvoltage:
24V


Colors:
● BK


OPTIC:
30°

Mainsvoltage:
DC24V

Description:
Magneticsuction

WLA1018NS

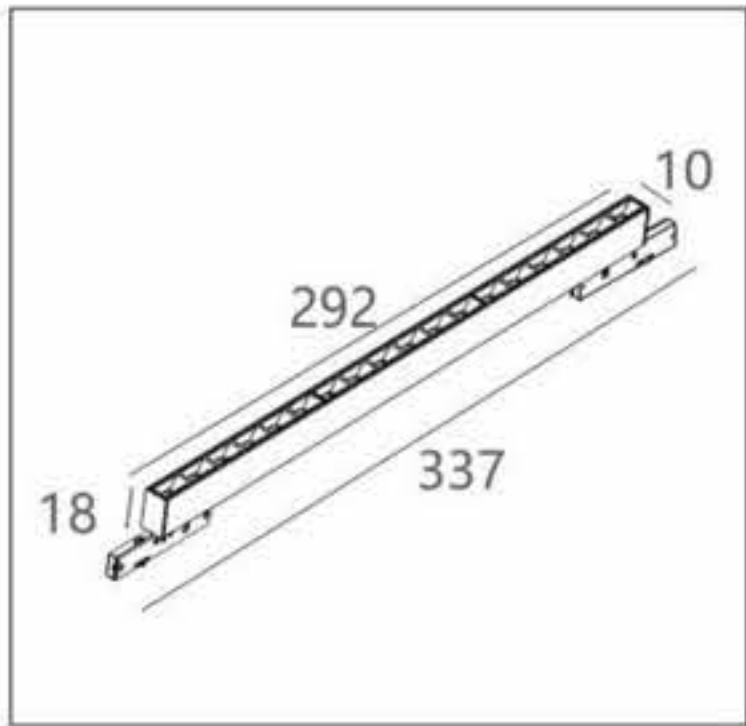



High CRI IP20

LightSource:
OSRAM

Luminousflux:
1600lm

CRI:
Ra>90

CCT:
3000K/4000K

Material:
Aluminum

Power:
15W

Outputvoltage:
24V


Colors:
● BK


OPTIC:
30°

Mainsvoltage:
DC24V

Description:
Magneticsuction

WLA1506DS

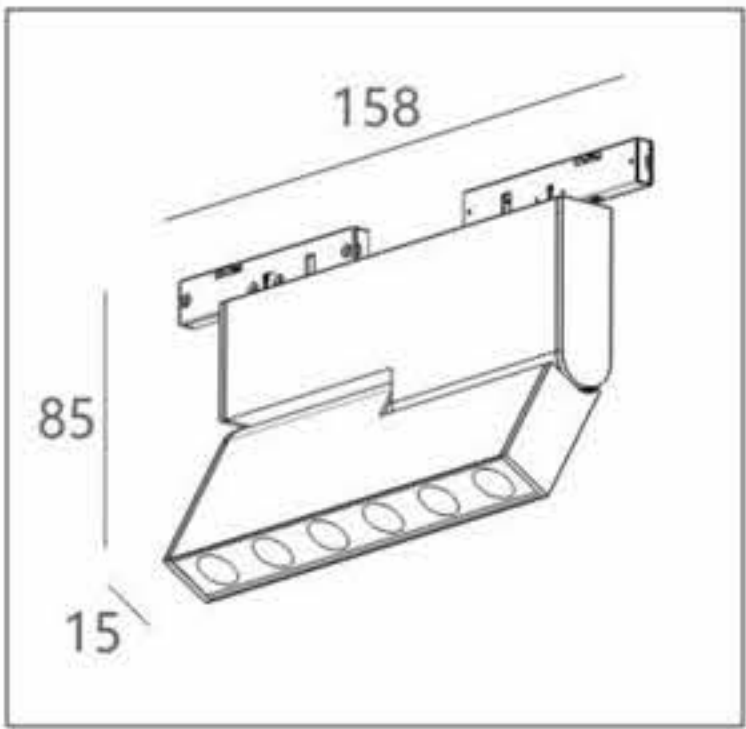



High CRI IP20

LightSource:
OSRAM

Luminousflux:
221lm

CRI:
Ra>90

CCT:
3000K/4000K

Material:
Aluminum

Power:
6W

Outputvoltage:
24V


Colors:
● BK

OPTIC:
30°

Mainsvoltage:
DC24V

Description:
Magnetic spot light

WLA1512DS

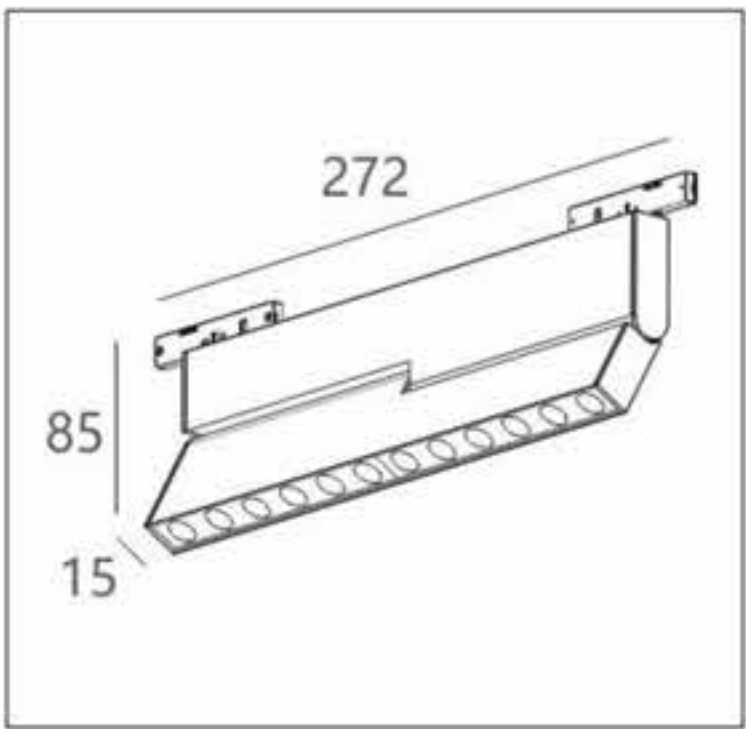



High CRI IP20

LightSource:
OSRAM

Luminousflux:
430lm

CRI:
Ra>90

CCT:
3000K/4000K

Material:
Aluminum

Power:
12W

Outputvoltage:
24V

Colors:
● BK

OPTIC:
30°


Mainsvoltage:
DC24V

Description:
Magnetic spot light



Mini
magnet track



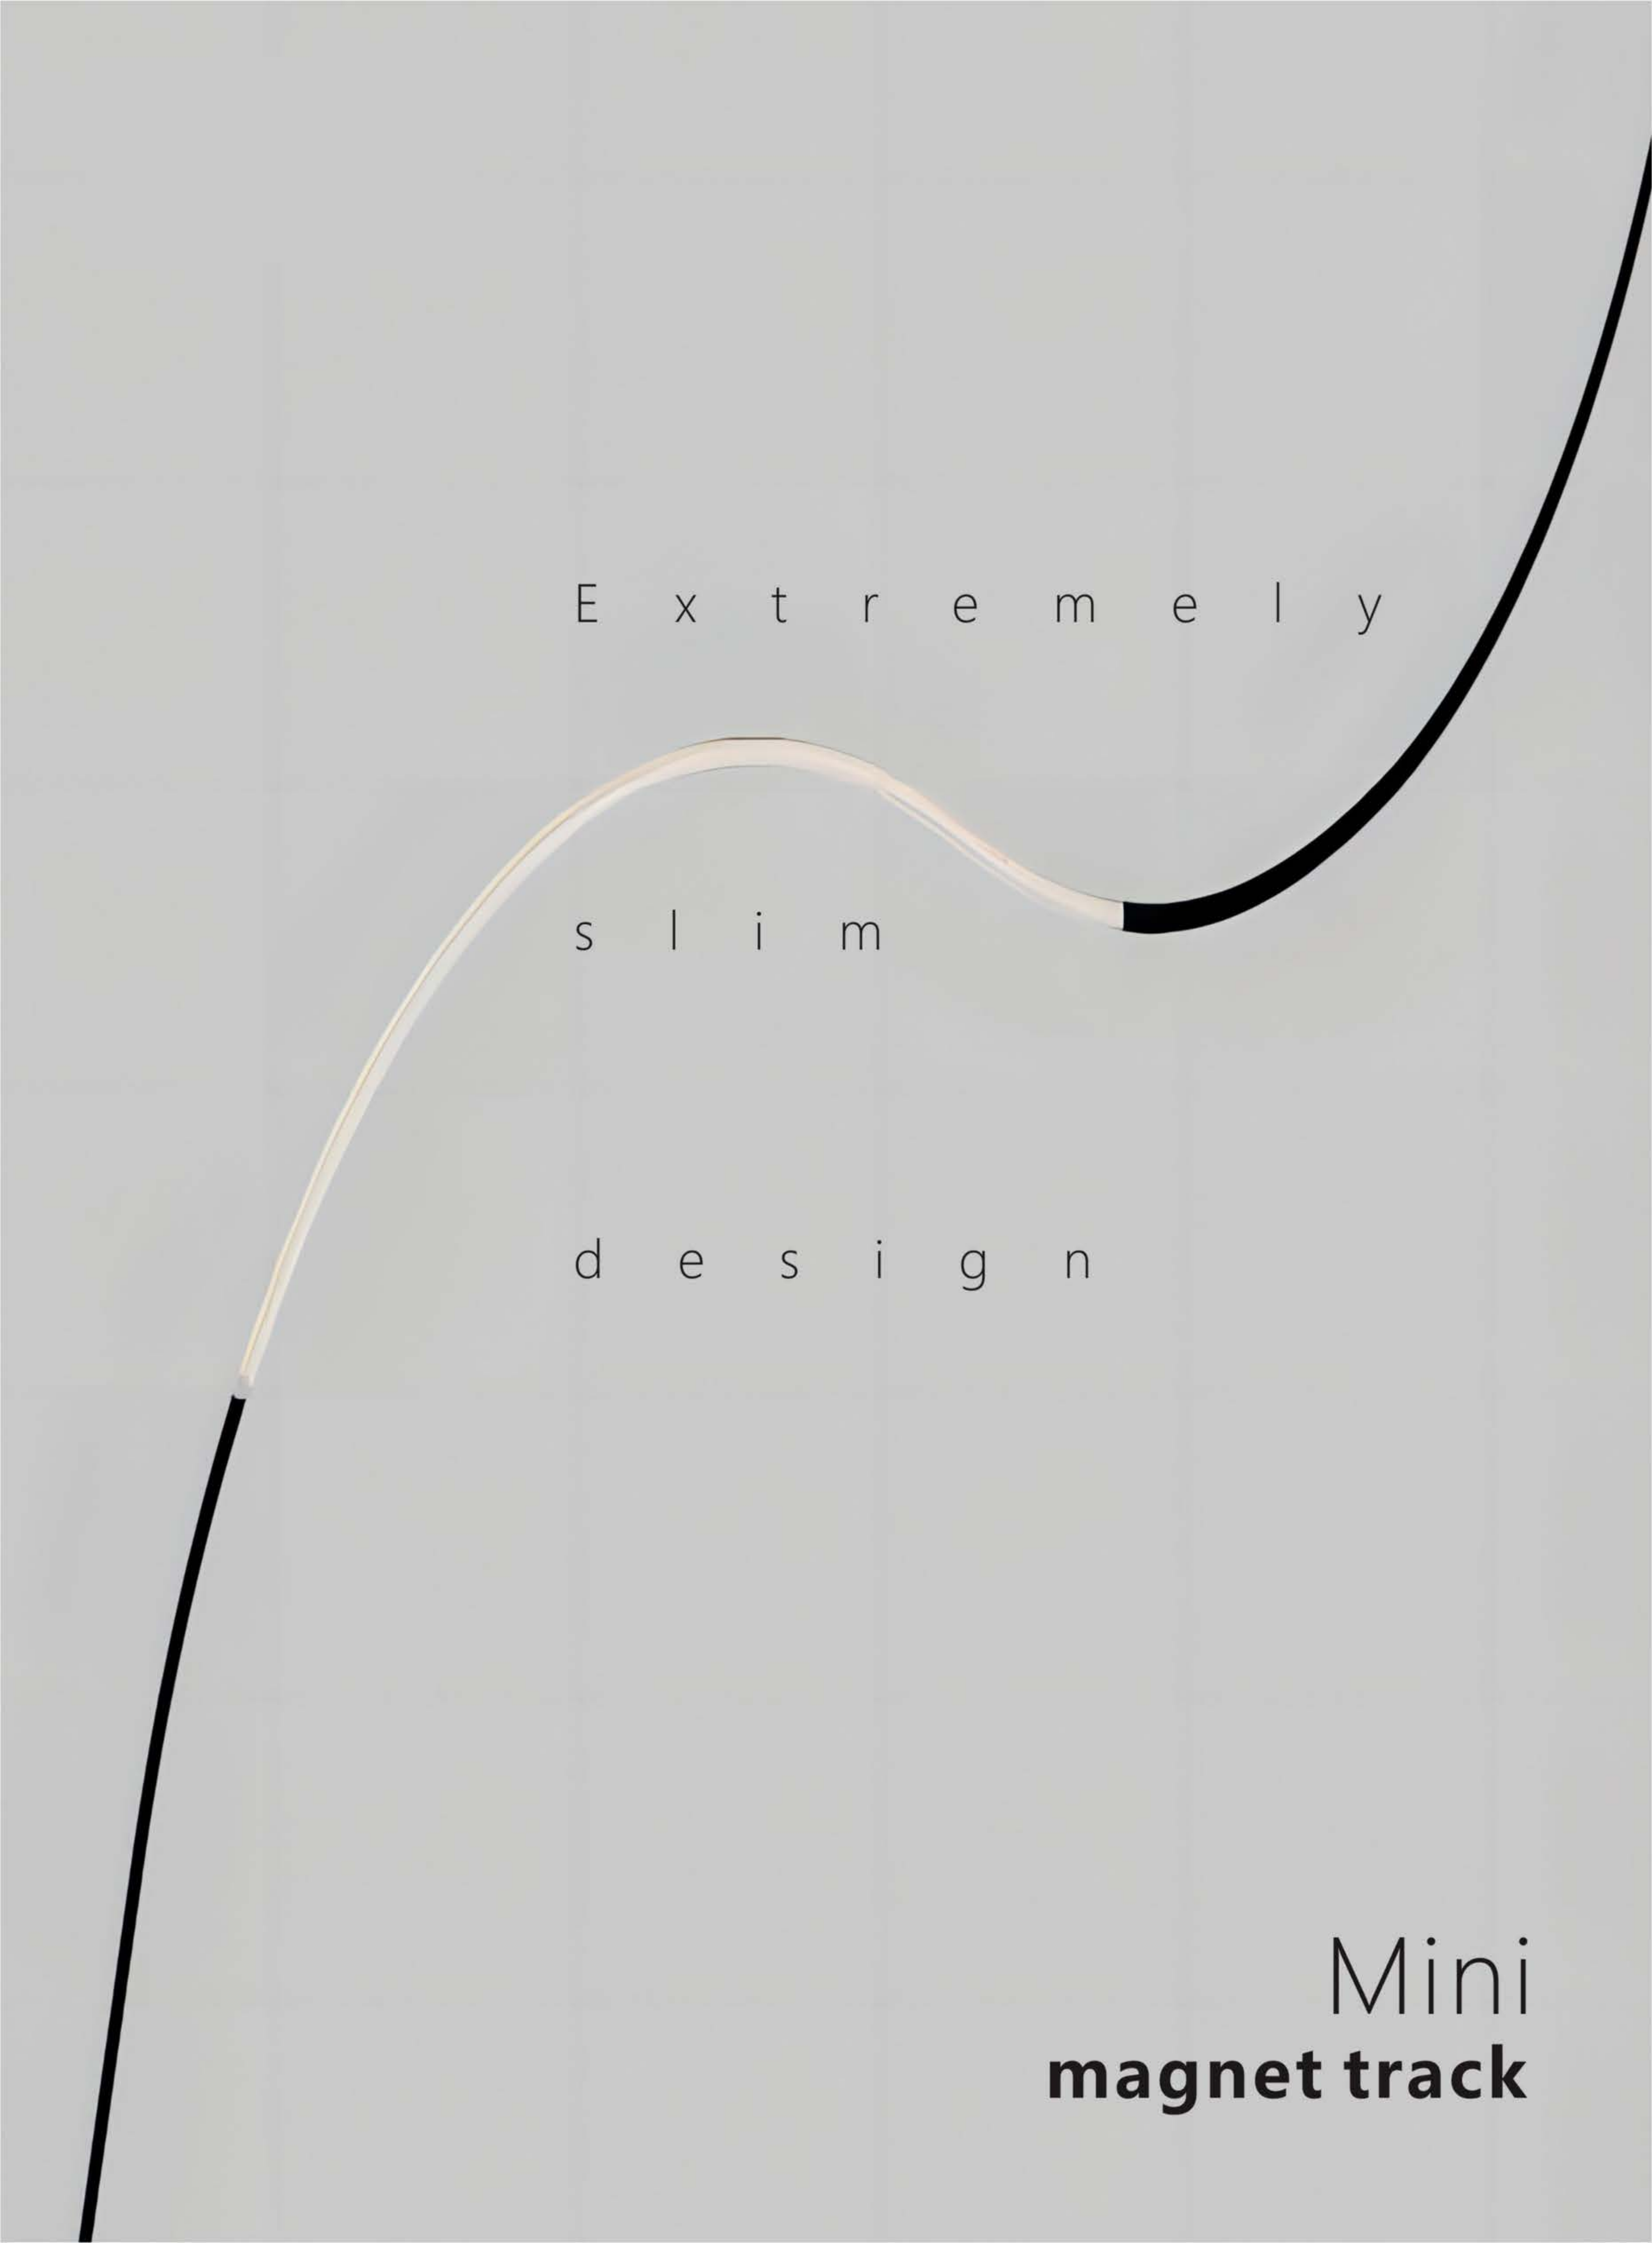


W05MAGNETSYSTEMseries

WYB0501NS

	 High CRI	 IP20	LightSource: SANAN	Material: Silicone	OPTIC: 100°
			CRI: Ra>80	Power: 8W	Mainsvoltage: DC24V
			CCT: 3000K/4000K	Outputvoltage: 24V	Description: Light Strip

1000

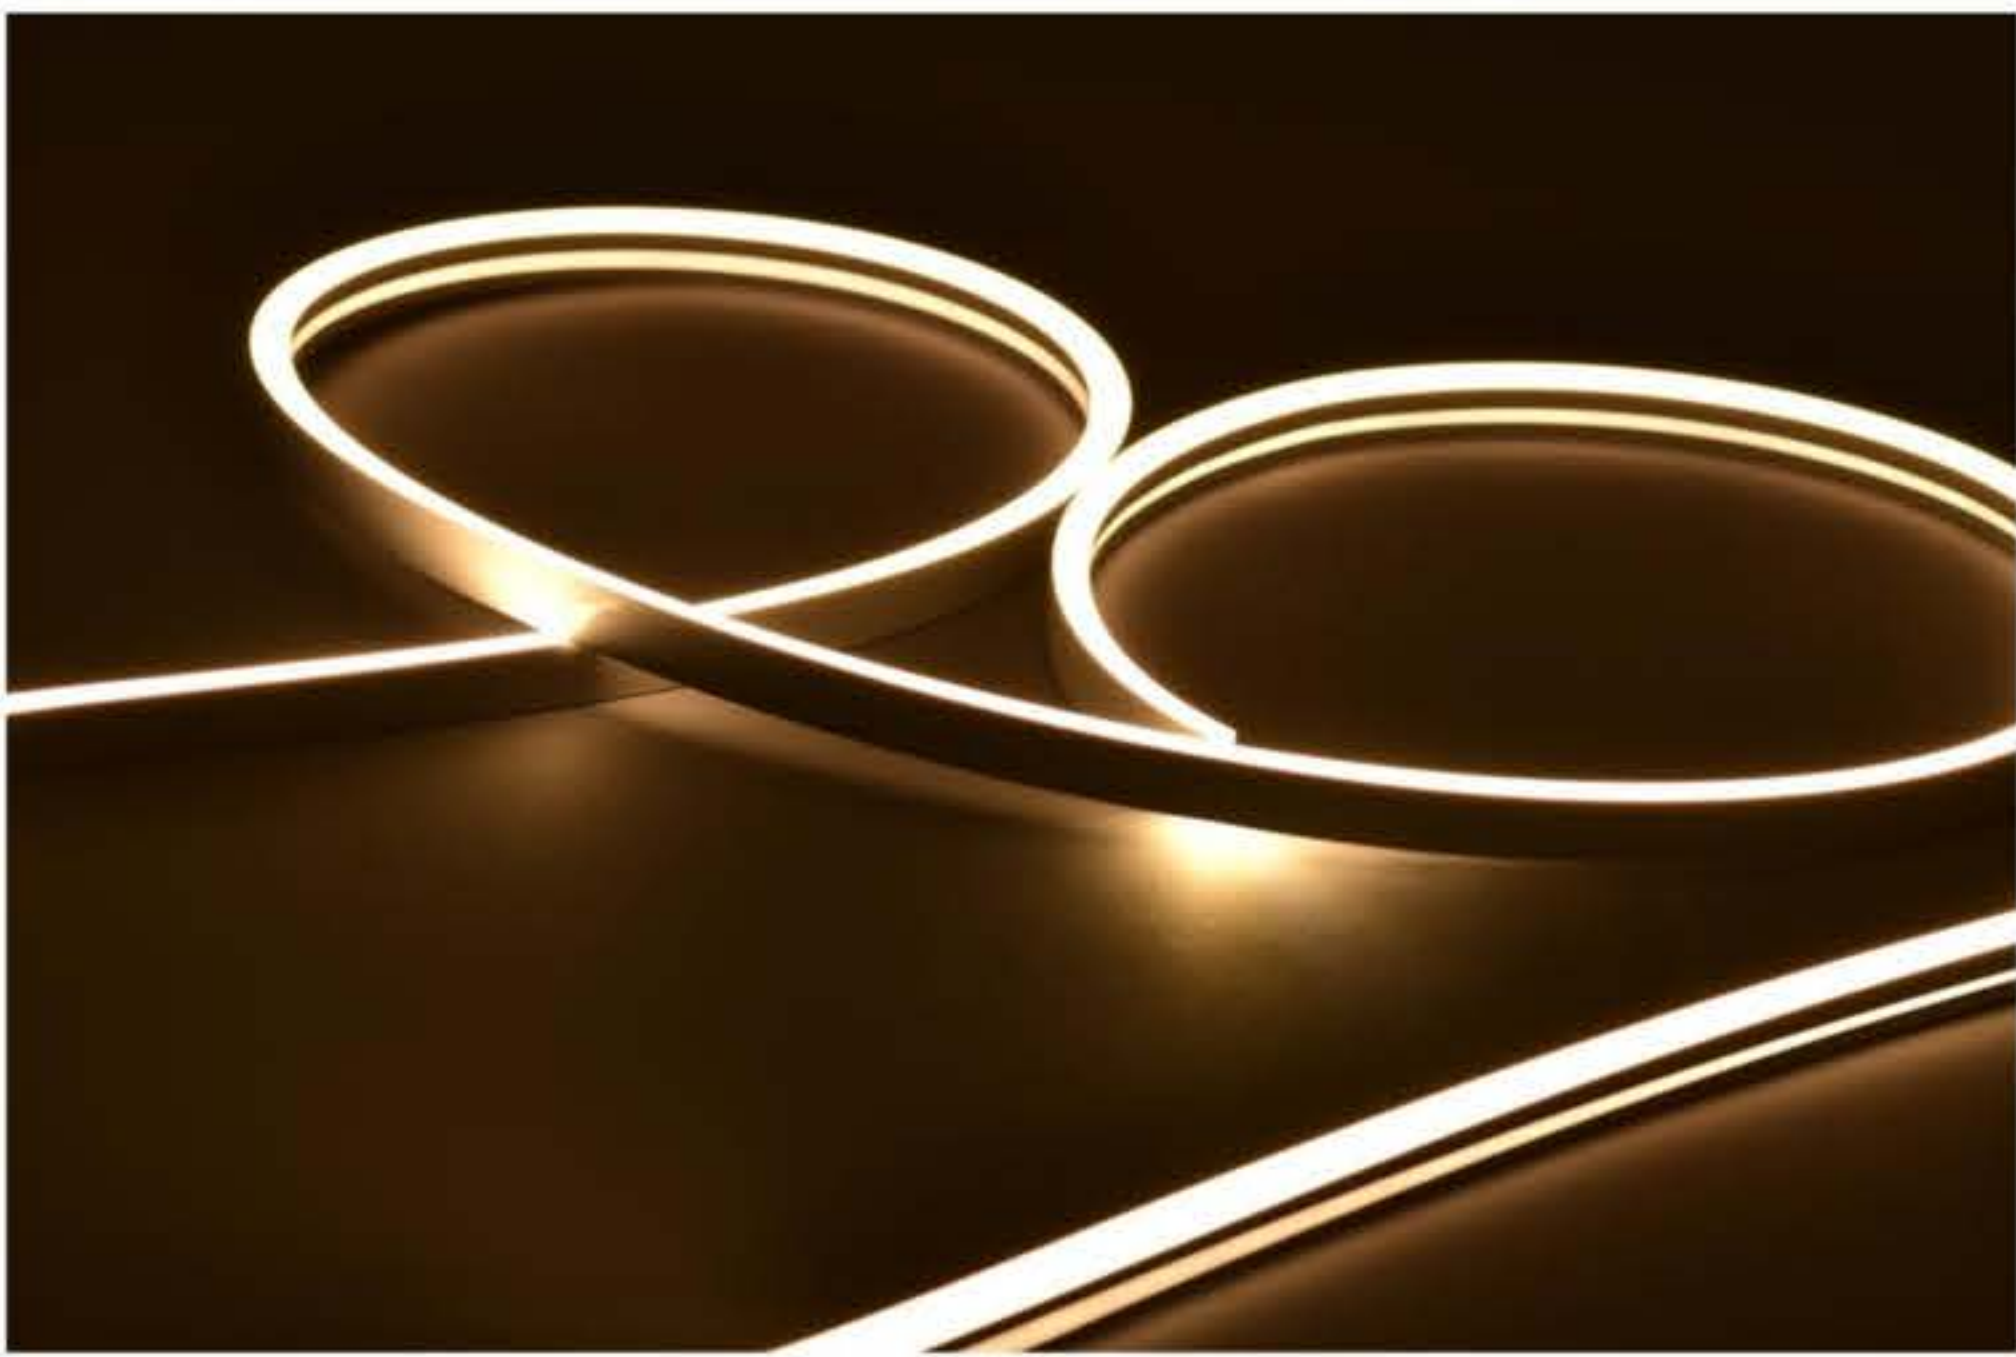

Mini
magnet track