


INGROUND BURIAL ASYMMETRICAL

Technical Data Sheet


Watt	: 3W / 6W / 9W
CCT	: 2700K / 3K / 4K / 6K
Lumens	: 220 / 350 / 540 Lm
Input Voltage	: 220VAC / 12VDC-24VDC option available
Angle	: 45° / 60° / 90° Asymmetrical
LED	: SMD
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 67
IK	: 08
Body Material	: Made of SS-304 grade steel
Pre-Mount Casing	: ABS material
Glass Material	: Clear toughened glass of 5mm thickness
Accessories	: IP 67 / IP 68 Connectors
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 500mm
Dimmable Support	: Triac-PWM-1-10V Dali

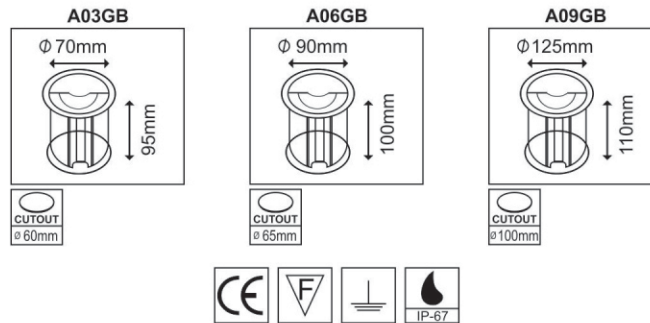

RLC-AGB-3W / AGB-6W / AGB-9W

Note : AGB : Asymmetrical Ground Burial

*Stainless Steel-316 Marine Grade on Request

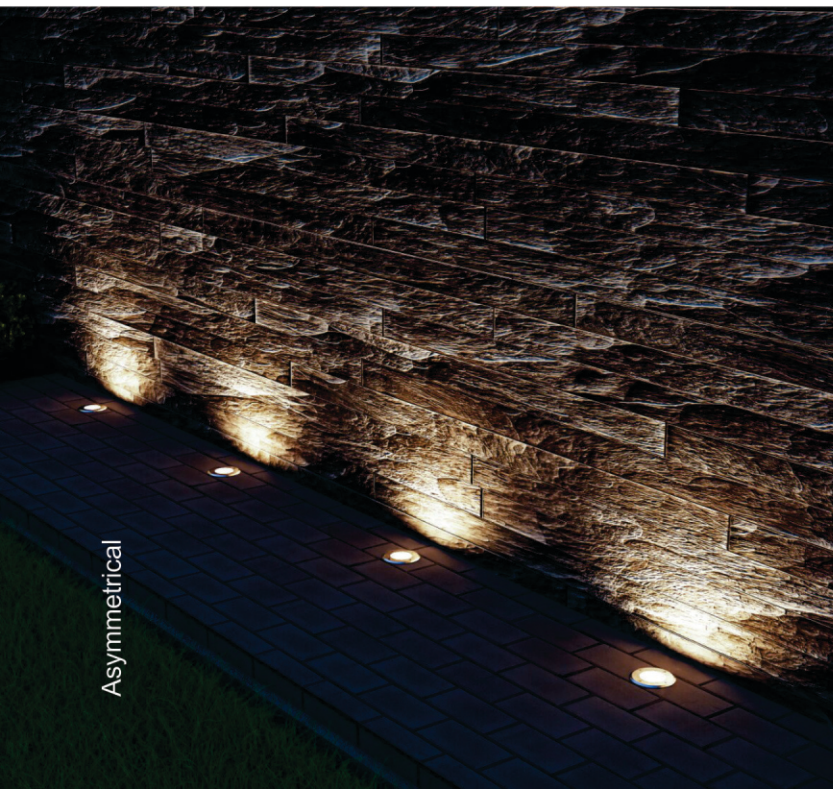

Asymmetrical

6



Beam Angle 45°