



Technical Data Sheet

Watt	: 3W / 6W / 9W / 18W
CCT	: 2700K / 3K / 4K / 6K / RGB / RGBW
Lumens	: 220 / 480 / 720 / 1400 Lm
Input Voltage	: 220VAC / 12VDC-24VDC option available
Angle	: 4° / 15° / 24° / 36°
Honeycomb	: Optional
LED	: SMD
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 67
IK	: 08
Body Material	: Body made of Die-cast Aluminium with : SS-304 Ring
Pre-Mount Casing	: ABS material
Glass Material	: Clear toughened glass of 5mm thickness
Accessories	: IP 67 / IP 68 Connectors
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 500mm
Dimmable Support	: Triac-PWM-1-10V Dali

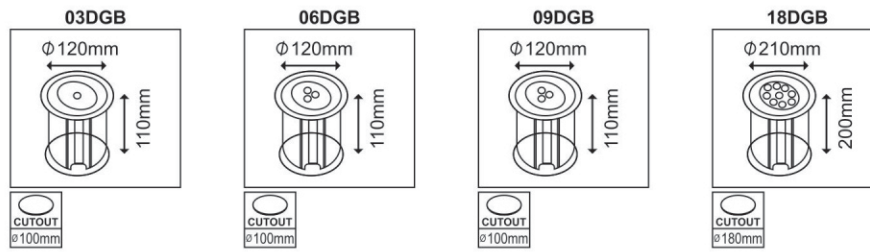

GB-D-3W / GB-D-6W / GB-D-9W / GB-D-18W

Note : GB-D : Ground Burial Directional Light

Honeycomb Louvre Available on Request

*Stainless Steel-316 Marine Grade Ring on Request

Beam Angle 4°



7

Beam Angle 36°

