

NET

PRICE

UNDERWATER LIGHTS

<i>sl</i>	<i>ITEM DESCRIPTION</i>	<i>Watt</i>	<i>no of Led</i>	<i>DIMENSION</i>	<i>ip-68</i>	<i>input volt</i>	<i>Single Colour</i>	<i>RGB/RGBW</i>
1	Surface pool light 3 watt-SS body	3w	1	Od-75 mmxH-25	IP-68	12vdc	2744	3155
2	surface pool light 6 watt-SS body	6w	2	od-75 mmxH-25	IP-68	12vdc	2921	3359
3	surface pool light 9 watt-SS body	9w	3	od-125 mmxH-25	IP-68	12vdc/24vdc	4248	4885
4	surface pool light 12 watt-SS body	12w	6	od-125 mmxH-25	IP-68	12vdc/24vdc	4602	5292
5	surface pool light 18 watt-SS body	18w	9	od-150 mmxH-25	IP-68	12vdc/24vdc	6018	6921
6	surface pool light 20 watt-ABS body	20w		od-230 mmxH-45	IP-68	12vdc	5841	6717
7	Recessed pool light -3 watt	3w	3	od-90mmxcut-65xdepth-70	IP-68	12vdc/24vdc	2921	3359
8	Recessed pool light -6 watt	6w	3	od-90mmxcut-65xdepth-70	IP-68	12vdc/24vdc	3098	3562
9	Recessed pool light -9 watt	9w	3	od-90mmxcut-65xdepth-70	IP-68	12vdc/24vdc	3452	3969
10	Recessed pool light -12 watt	12w	6	od-125mmxcut-85xdepth-70	IP-68	12vdc/24vdc	4956	5699
11	Recessed pool light -18 watt	18w	9	od-150mmxcut-110xdepth-80	IP-68	12vdc/24vdc	6018	6921
12	Recessed pool light -24 watt	24w	12	od-150mmxcut-110xdepth-80	IP-68	12vdc/24vdc	6726	7735
	GST @18% EXTRA							
	WARRANTY- 2 YEARS FROM DATE OF SUPPLY							
	For colour full led /RGB /RGBW ADD 8%-15%-20% on similar model							
	This standard price only for 2700k-3000k-4000k-6000k							

FOUNTAIN LIGHTS

ITEM DESCRIPTION	watt	no of led	DIMENSION	IP-68	INPUT VOLT	Single	RGB/RGBW
Fountain light-2 watt with U-clamp	2w	1	OD-50mmxH-65 mm	IP-68	12VDC	2230	2565
Fountain light-3 watt with-U-clamp	3w	3	OD-90mmxH-75 mm	IP-68	12V/24VDC	2891	3325
Fountain light-6 watt with U-clamp	6w	3	OD-90mmxH-75 mm	IP-68	12V/24VDC	3221	3705
Fountain light-9 watt with U-clamp	9w	3	OD-90mmxH-75 mm	IP-68	12V/24VDC	3552	4085
Fountain light-12 watt with U-clamp	12w	6	OD-125mmxH-80 mm	IP-68	12V/24VDC	5204	5984
Fountain light-18 watt with U-clamp	18w	9	OD-150mmxH-90 mm	IP-68	12V/24VDC	6278	7219
Nozzol fountain light-6 watt -Donut design	6w	6	OD-125mmxH-50 mm	IP-68	12V/24VDC	5286	6079
Nozzol fountain light-9 watt-Donut design	9w	9	OD-125mmxH-50 mm	IP-68	12V/24VDC	5782	6649
Nozzol fountain light-12 watt-Donut design	12w	6	OD-150mmxH-50 mm	IP-68	12V/24VDC	6608	7599
Nozzol fountain light-18 watt-Donut design	18w	9	OD-150mmxH-50 mm	IP-68	12V/24VDC	7104	8169
This standard price only for 2700k-3000k-4000k-6000k							
GST @18% EXTRA							
WARRANTY- 2 YEARS FROM DATE OF SUPPLY							
For colour full led /RGB /RGBW ADD 8%-15%-20% on similar model							

SI No	ITEM	OP.Volt	WATTS	NO OF LED	MAKE OF LED	IMAGES	MOC	DIMENSION	PRICE-ip-68
1	LED GROUND UP LIGHTER-(JSRC--1-01-GB-220V)	220VAC(ip-67) /12VDC(ip-68)	1	1 led x1 watt	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH ABS MOUNTING BOX	OD-50 mm - ID-45 mm- depth-70 mm	1781
2	LED GROUND UP LIGHTER-(JSRC-3-02-GB-12V)	12VDC	3	1 LED x3 watt	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH ABS MOUNTING BOX	OD-50 mm - ID-45 mm- depth-70 mm	2090
3	LED GROUND UP LIGHTER-(JSRC-3-03-GB-220VAC)	220VAC(ip-67) /12VDC(ip-68)	3	3 LED X1 WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH ABS MOUNTING BOX	OD-85 mm - ID-65 mm- depth-100 mm	2817
4	LED GROUND UP LIGHTER-(JSRC-6-03-GB-220V)	220VAC(ip-67) /12VDC(ip-68)	6	3 LED X2 WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH ABS MOUNTING BOX	OD-85 mm - ID-65 mm- depth-100 mm	3362
5	LED GROUND UP LIGHTER-(JSRC-9-03-GB-220V)	220VAC(ip-67) /12VDC(ip-68)	9	3ledx3WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH ABS MOUNTING BOX	OD-85 mm - ID-65 mm- depth-100 mm	3816
6	LED GROUND UP LIGHTER-(JSRC-12-04-GB-220V)	220VAC(ip-67) 12VDC(ip-68)	12/	6 ledx2WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH ABS MOUNTING BOX	OD-125 mm - ID-100 mm- depth-125 mm	5088
7	LED GROUND UP LIGHTER-(JSRC-18-05-GB-220V)	220VAC(IP-67)/12VDC(IP-68)	18	9 led x2 WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH ABS MOUNTING BOX	OD-155 mm - ID-120 mm- depth-150 mm	6360.2
8	LED GROUND UP LIGHTER-(JSRC-24-06-GB-220V)	220VAC(IP-67)/12VDC(IP-68)	18	12 led x2 WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH ABS MOUNTING BOX	OD-155 mm - ID-120 mm- depth-150 mm	7632.24
9	LED FOUNTAIN LIGHT-(JSRC 1-13FO)	12VDC	3	1X3 WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH SS MOUNTING BRACKET	OD-50 mm - ID-35 mm- Height-70 mm	2453.22
10	LED FOUNTAIN LIGHT-(JSRC 6-14FO)	12VDC/24VDC	6 and 9	3X2WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH SS MOUNTING BRACKET	OD-50 mm - ID-60 mm- Height-90 mm	3906.98
11	LED FOUNTAIN LIGHT-(JSRC 9-15FO)	12VDC/24VDC	9	3X3WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH SS MOUNTING BRACKET	OD-70 mm - Height-130 mm	4452.14
12	LED FOUNTAIN LIGHT-(JSRC 12-16FO)	12VDC/24VDC	12	6X2WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH SS MOUNTING BRACKET	OD-90 mm - Height-130 mm	5815
13	LED FOUNTAIN LIGHT-(JSRC 18-17FO)	12VDC/24VDC	18	9X2WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 WITH SS SPIKE MOUNTING BRACKET.	OD-120 mm - Height-150 mm	6905
14	LED FOUNTAIN LIGHT-(JSRC-12-18FO)	12VDC/24VDC	12	6 Ledx2 WATT	Edission/ OSRAM/CREE		WHOLE BODY FROM SS-304 .	OD-150 mm - Height-50 mm	6360

SI No	ITEM	OP.Volt	WATTS	NO OF LED	MAKE OF LED	IMAGES	MOC	DIMENSION	PRICE-ip-68
15	LED POOL LIGHT ABS -(JSRC-12-11PL)	12VDC	2W/18 w	120 LED	Edission/ OSRAM/CREE		ABS BODY-WHITE COLOUR	OD-230 mm - Height-40 mm	4725
16	LED POOL LIGHT SSB -(JSRC-18-13PL)	12VDC	2W/18 w	120 LED	Edission/ OSRAM/CREE		SS-BODY WITH BLUE RING	OD-230 mm - Height-40 mm	5270
17	LED POOL LIGHT SS -(JSRC-18-12PL)	12VDC/24VDC	12	9 LED X1.5 WATT	Edission/ OSRAM/CREE		SS-BODY WITH SECONDARY OPTICS	OD-150 mm - Height-40 mm, OD-40 mm -	8177.4
	Freight Extra as per acctuals								
	warranty- 2- year from date of supply.								
ALL - IP-67 Light price are inclusive of driver where as all IP-68 Lights Driver price Extra as per requirment									
RGB /Colour chamging Light compatible on all fitting/price on request only.									
This price for standard colour 2700k/3000k/6000k									


SURFACE MOUNT POOL LIGHT STAINLESS STEEL

Technical Data Sheet

Watt	: 3W / 6W / 9W / 12W / 18W
CCT	: 2700k / 3K / 4K / 6K / RGB / RGBW
Lumens	: 180 / 360 / 540 / 720 / 1080 Lm
Input Voltage	: 12VDC-24VDC
Angle	: 15° / 24° / 36° / 60° / Asymmetrical
LED	: SMD
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 68
IK	: 08
Body Material	: Made from SS 304 Grade Steel
Glass Material	: Clear toughened glass of 5mm thickness
Accessories	: IP 68 Connectors
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 1mtr
Dimmable Support	: Triac-PWM-1-10V Dali



SS Diffused

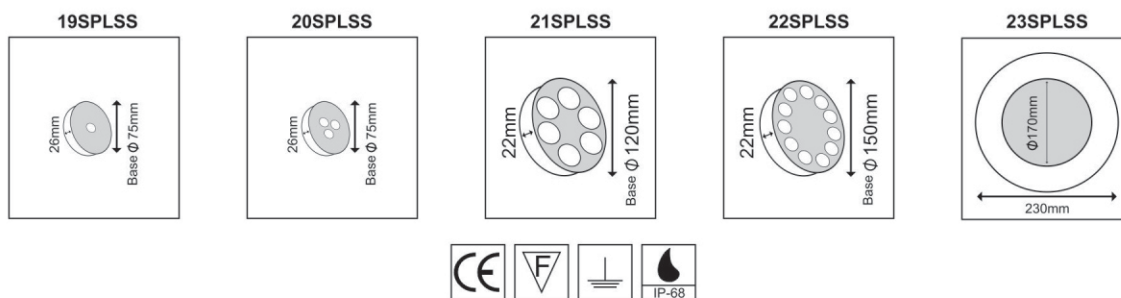

□ RLC-19SPLSS-3W / 20SPLSS-6W / 21SPLSS-9W / 22SPLSS-12W / 23SPLSS-18W

Note : SPL-Surface Pool Light SS Body

*Stainless Steel-316 Marine Grade on Request



Diffused Beam







Beam Angle 36°

SURFACE MOUNT POOL LIGHT ABS BODY

Technical Data Sheet

Watt	: 12W / 18W / 22W
CCT	: 3K / 6K / Blue
Lumens	: 580 / 880 / 1080 Lm
Input Voltage	: 12VDC
Angle	: Diffused
LED	: SMD
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 68
IK	: 08
Body Material	: Made of ABS
Glass Material	: Poly Carbonate Diffused
Accessories	: IP 68 Connectors on request
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 1mtr
Dimmable Support	: Triac-PWM-1-10V Dali

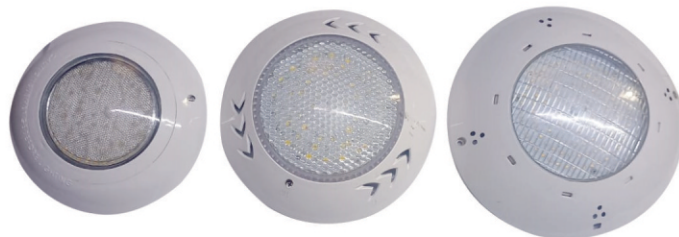


ABS Body


RLC-SPL-ABS230-12W/ 18W/ 22W | SPL-ABS260-12W / 18W / 22W | SPL-ABS280-12W / 18W / 22W

Note : SPL-Surface Pool Light ABS Body

*Extra Cable Length Available on Request

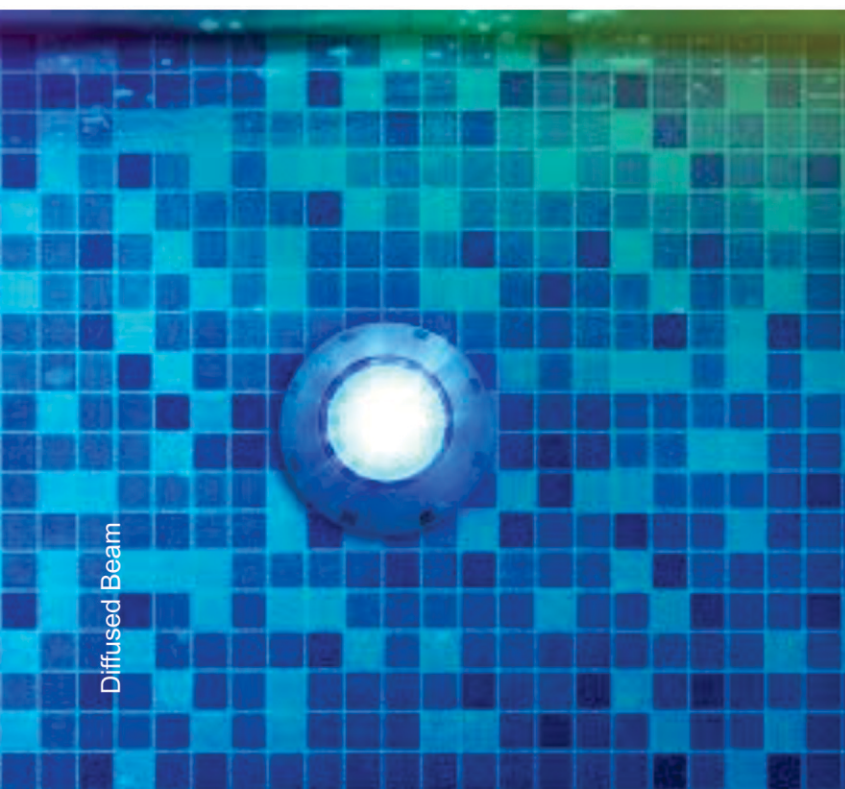

Diffused Beam

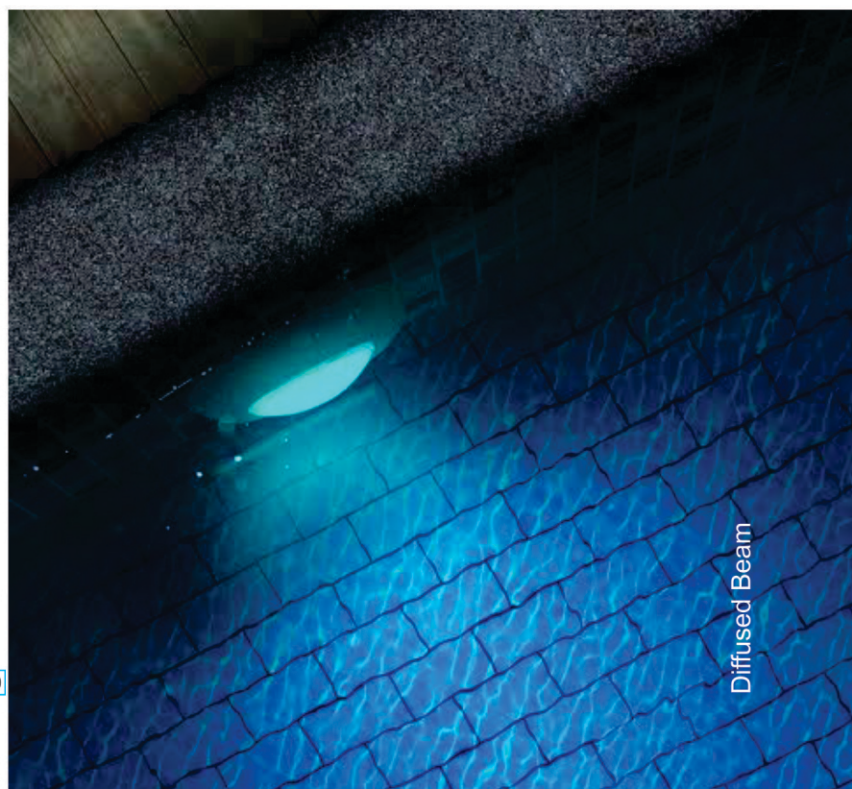

Diffused Beam


RECESSED POOL LIGHT STAINLESS STEEL

Technical Data Sheet

Watt	: 1W / 3W / 6W / 9W / 12W / 18W / 24W
CCT	: 2700K / 3K / 4K / 6K / RGB / RGBW
Lumens	: 60 / 180 / 360 / 540 / 720 / 1080 / 1440 Lm
Input Voltage	: 12VDC-24VDC
Angle	: 15° / 24° / 36° / 60° / Asymmetrical
LED	: SMD
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 68
IK	: 08
Body Material	: Made of SS 304 Grade Steel
Pre-Mount Casing	: ABS material
Glass Material	: Clear toughened glass of 5mm thickness
Accessories	: IP 68 Connectors on request
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 1mtr
Dimmable Support	: Triac-PWM-1-10V Dali



Asymmetrical

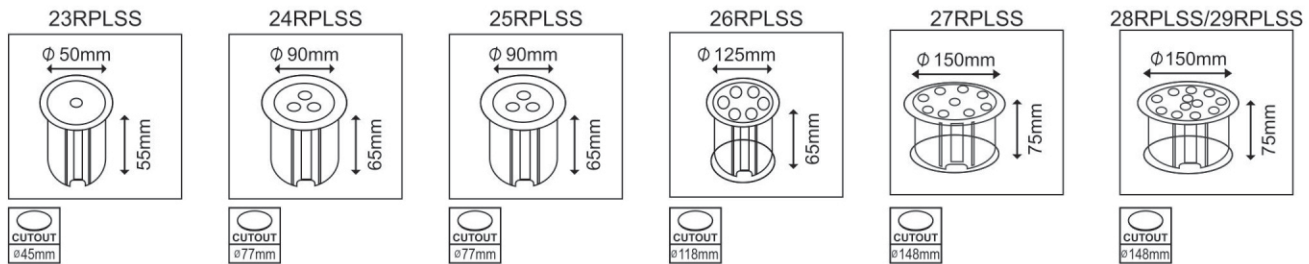

RLC-23RPLSS-1W / 24RPLSS-3W / 25RPLSS-6W / 26RPLSS-9W / 27RPLSS-12W / 28RPLSS-18W / 29RPLSS-24W

NOTE : RPLSS-RECESSED POOL LIGHT STAINLESS STEEL BODY

*Extra Cable Length Available on Request

*Stainless Steel-316 Marine Grade on Request



Beam Angle 15°




Beam Angle 60°

SURFACE MOUNT FOUNTAIN LIGHT SS

Technical Data Sheet

Watt	: 1W / 3W / 6W / 9W / 12W / 18W
CCT	: 2700K / 3K / 4K / 6K / RGB / RGBW
Lumens	: 60 / 180 / 360 / 540 / 720 / 1080 Lm
Input Voltage	: 12VDC-24 VDC
Beam Angle	: 15° / 24° / 36° / 60° / Asymmetrical / Diffused
LED	: SMD
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 68
IK	: 08
Body Material	: Made of SS 304 Grade Steel
Glass Material	: Clear toughened glass of 5mm thickness
Accessories	: IP 68 Connectors on request
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 500mm
Dimmable Support	: Triac-PWM-1-10V Dali

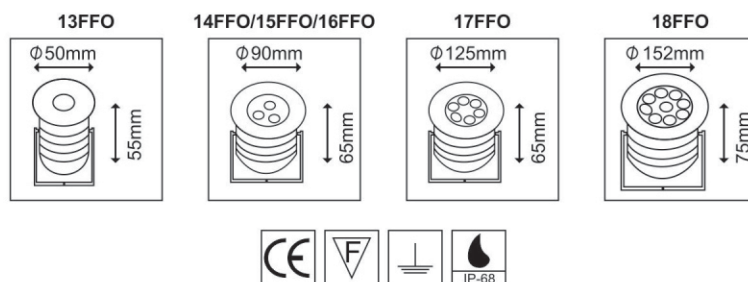

RLC-13FFO-1W / 14FFO-3W / 15FFO-6W / 16FFO-9W / 17FFO-12W / 18FFO-18W

Note : FFO- Floor Mount Fountain Light

*Extra Cable Length Available on Request




*Stainless Steel-316 Marine Grade on Request



FOUNTAIN NOZZLE LIGHT (DONUT) SS

Technical Data Sheet

Watt	: 6W / 12W / 18W
CCT	: 2700K / 3K / 4K / 6K / RGB / RGBW
Lumens	: 350 / 580 / 960 Lm
Input Voltage	: 12VDC-24VDC
Angle	: 15° / 24° / 36° / 60°
LED	: SMD
Nozzle Size	: 40mm / 65mm
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 68
IK	: 08
Body Material	: Made of SS 304 Grade Steel
Glass Material	: Clear toughened glass of 5mm thickness
Accessories	: IP 68 Connectors
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 500mm
Dimmable Support	: Triac-PWM-1-10V Dali

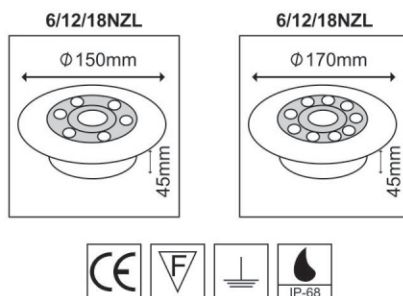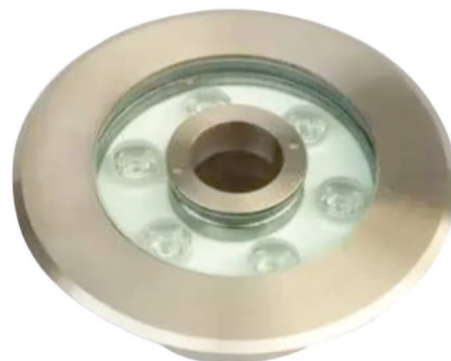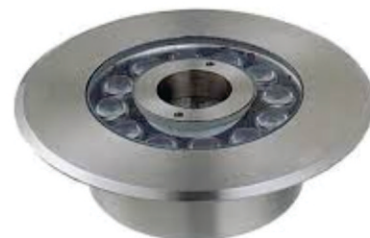

□ RLC-NZL-6W / NZL-12W / NZL-18W

NOTE : NZL-Nozzle Fountain Light

*Extra Cable Length Available on Request

*Stainless Steel-316 Marine Grade on Request



LINEAR UNDER WATER LIGHT

Technical Data Sheet

Watt	: 10W / 15W / 24W
CCT	: 2700K / 3K / 4K / 6K
Lumens	: 400 / 600 / 1600 Lm
Input Voltage	: 12VDC-24VDC
Angle	: Diffused / 15° x 30° / 15 / 24 / 36 / 60 / 15° x 30° / 15° x 55°
LED	: SMD
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 68
IK	: 08
Body Material	: Made of Aluminium Powder Coated
	: Body Made of Clear Poly Carbonate & SS
Glass Material	: Clear toughened glass of 8mm thickness
Accessories	: IP 68 Connectors on request
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 1mtr
Dimmable Support	: Triac-PWM-1-10V Dali




Surface Round Linear Under Water



Recessed Linear Under Water




Surface Linear Diffused Under Water

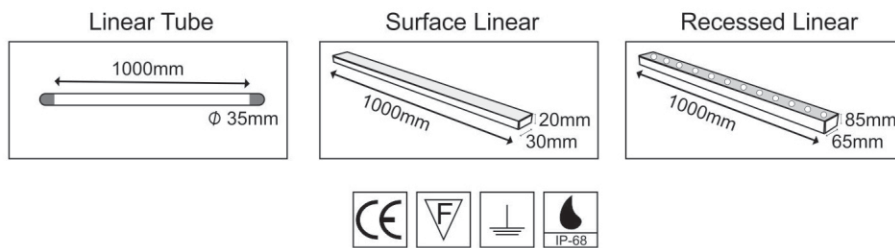

RLC-LT-10W / SL-15W / RL-24W

NOTE : LT-Linear Tube Round | SL-Surface Mount Linear | RL-Floor Recessed Linear

*Extra Cable Length Available on Request

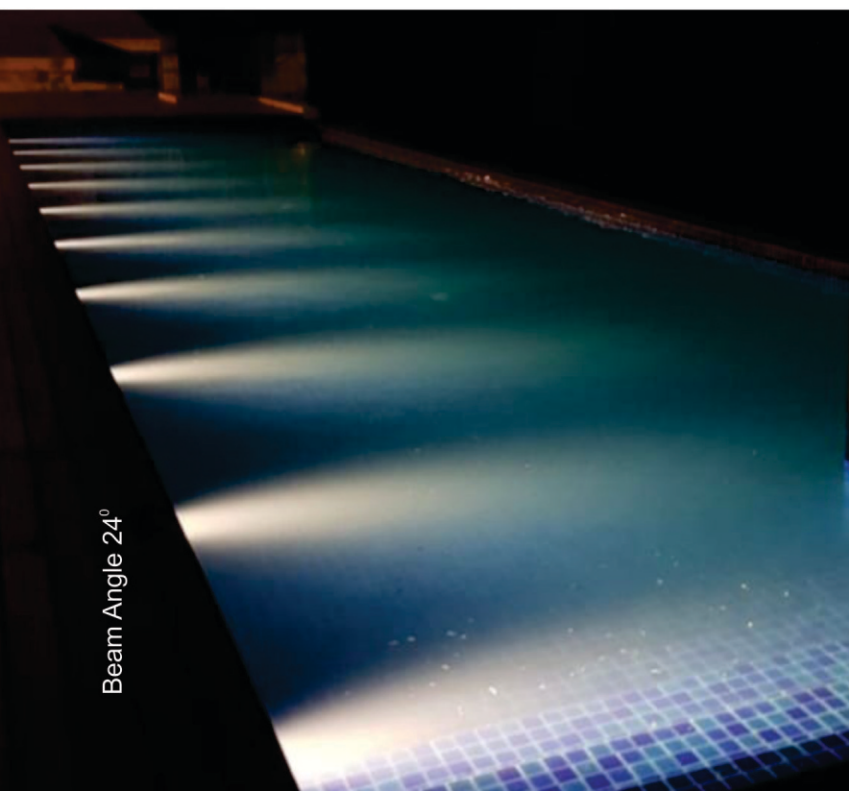

Beam Angle 24°

14



Beam Angle 15°