In-Ground Asymmetrical LED Uplighter

IP67 · 220VAC / 12VDC / 24VDC · SS304 body

Lighting	
Wattage / lumens	6W · 350 lm; 9W · 540 lm; 12W
Colour temperature (CCT)	2700K / 3000K / 4000K / 6000K
Beam angle	45° / 60° / 90° Asymmetrical
LED	SMD / COB
CRI	>85

Electrical	
Input voltage	220VAC / 12VDC-24VDC
Life span	50000 Hours
Power factor	>0.9
Power cable	High Temperature Silicon 3C×1mm²
Dimming	Triac / PWM / 1-10V / DALI

Build & protection	
Ingress protection	IP 67
Impact rating (IK)	08
Body	Made of SS-304 grade steel
Pre-mount casing	ABS material
Glass	Clear toughened glass of 5mm thickness
Accessories	IP 67 / IP 68 Connectors



Product view




Alternative view

Versions available on our website

Size & Wattage	6w-COB-90mm · 9w-COB-90mm · 12w-COB-125mm
LED Colour	Warm White (2.7k) · Warm White (3k) · Neutral White (4k) · White (6k)
Input Voltage & IP rating	220VAC(IP-67)

Dimensions (mm)

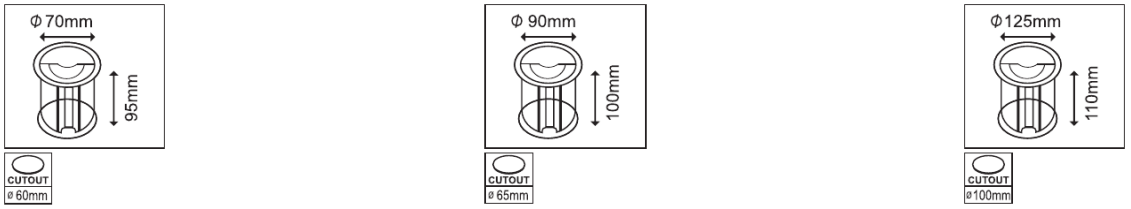

Ø70 mm | Ø90 mm | Ø125 mm

Family dimension references. Confirm the housing size for the selected wattage before installation.

CE **IP67** **Class I earthing**

Stainless Steel-316 Marine Grade on Request · Lumen values are stated only where specified for that wattage.

