Heavy Linear Wall Washer

IP66 · 220VAC / 12VDC / 24VDC · Aluminium body

Lighting	
Wattage / lumens	6W; 12W · 960 lm; 18W · 1440 lm; 24W · 1920 lm; 30W; 36W · 2850 lm; 48W · 3840 lm; 60W · 4950 lm
Colour temperature (CCT)	2700K / 3000K / 4000K / 6000K / RGB / RGBW
Beam angle	6° / 15° / 24° / 36° / 60° / 15° × 30° / 15° × 55°
LED	SMD
Honeycomb	Optional
CRI	>85

Electrical	
Input voltage	220VAC-12VDC-24VDC
Life span	50000 Hours
Power factor	>0.9
Power cable	High Temperature Silicon 3C×1mm²
Dimming	Triac / PWM / 1-10V / DALI

Build & protection	
Fixture colour	Black / Graphite gray / Off-white / Silver
Ingress protection	IP 66
Impact rating (IK)	07
Body	Made of Extruded Aluminium with Powder Coated
Glass	Clear toughened glass of 4mm thickness
Accessories	IP 67 Connectors; Honeycomb Louvre Option Available



Product view




Alternative view


Versions available on our website

Size & Wattage	1200mm 30 Led 60w · 1200mm 24 Led 48w · 1000mm 24 Led 48w · 1000mm 36 Led 36w · 1000mm 24 Led 24w · 1000mm 18 Led 18w · 600mm 15 Led 30w · 600mm 12 Led 24w · 500mm 12 Led 24w · 500mm 9 Led 18w · 500mm 12 Led 12w · 300mm 6-12led Led 6w-12w
LED Colour	Single Colour(27k/3k/4k/6k) · Coloured(Red/Green/Blue/Amber) · RGB · RGBW
Input Voltage	220vac · 12v/24vdc


Dimensions (mm)

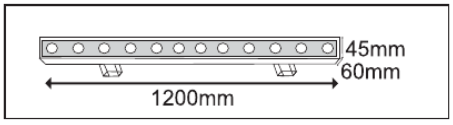


1200 mm

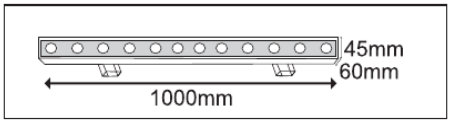


1000 mm

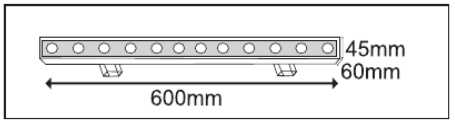

600 mm

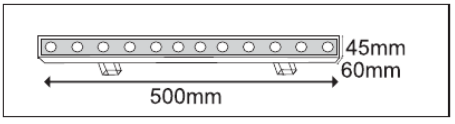

500 mm

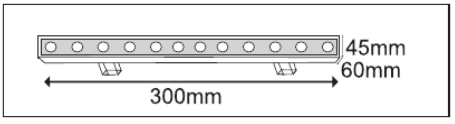

300 mm

CE · **IP66** · **Class I earthing**

Honeycomb Louvre Available on Request · Lumen values are stated only where specified for that wattage.

