In-Ground Linear Wall Washer

IP67 · 220VAC / 12VDC / 24VDC · Aluminium body

Lighting	
Wattage / lumens	6W; 12W · 960 lm; 18W · 1440 lm; 24W · 1920 lm; 30W; 36W · 2850 lm; 48W · 3840 lm; 60W · 4950 lm
Colour temperature (CCT)	2700K / 3000K / 4000K / 6000K / RGB / RGBW
Beam angle	6° / 15° / 24° / 36° / 60° / 15° × 30° / 15° × 55° / Diffused
LED	SMD
Honeycomb	Optional
CRI	>85

Electrical	
Input voltage	220VAC-12VDC-24VDC
Life span	50000 Hours
Power factor	>0.9
Power cable	High Temperature Silicon 3C×1mm²
Dimming	Triac / PWM / 1-10V / DALI

Build & protection	
Fixture colour	Black / Graphite gray / Off-white / Silver
Ingress protection	IP 67
Impact rating (IK)	09
Body	Made of Extruded Aluminium with Powder Coated
Housing	Housing Made of GI Powder Coated
Glass	Clear toughened glass of 8mm thickness
Accessories	IP 67 Connectors; Honeycomb Louvre Option Available




Product view


Versions available on our website

Size & Wattage	1200mm 30 Led 60w · 1200mm 24 Led 48w · 1200mm 30 Led 36w · 1200mm 24 Led 24w · 1200mm 36 Led 36w · 1000mm 24 Led 48w · 1000mm 36 Led 36w · 1000mm 24 Led 24w · 1000mm 18 Led 18w · 600mm 15 Led 30 w · 600mm 12 Led 24w · 600mm 9 Led 18w · 600mm 15 Led 30w · 500mm 12 Led 24w · 500mm 9 Led 18w · 500mm 12 Led 12w · 300mm 6-12led Led 6w-12w
LED Colour	Single Colour(27k/3k/4k/6k) · Coloured(Red/Green/Blue/Amber) · RGB · RGBW
Input Voltage	220vac · 12v/24vdc


Dimensions (mm)

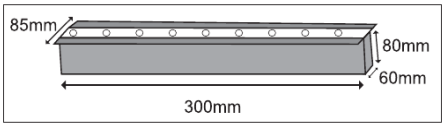


300 mm

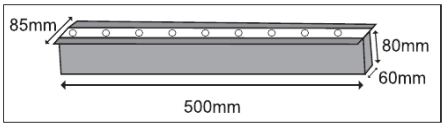

500 mm

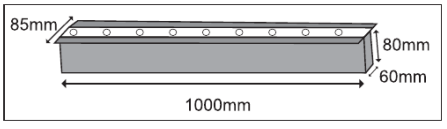

1000 mm

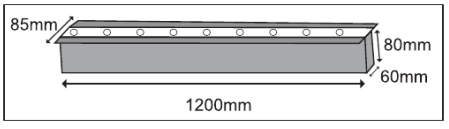

1200 mm

Family dimension references; the 600 mm version follows the same profile.

CE **IP67** **Class I earthing**

Honeycomb Louvre Available on Request · Drive-over SS plate available on request · Lumen values are stated only where specified for that wattage.