# Ultra Slim Outdoor Linear Wall Grazer

IP66 · 12VDC / 24VDC · Aluminium body

| Lighting | |
|---|---|
| Wattage / lumens | 12W · 980 lm; 18W · 1450 lm; 24W · 1920 lm |
| Colour temperature (CCT) | 2700K / 3000K / 4000K / 6000K / RGB / RGBW |
| Beam angle | 15° / 24° / 36° / 60° |
| LED | SMD |
| Honeycomb | Optional |
| CRI | >85 |

| Electrical | |
|---|---|
| Input voltage | 12VDC-24VDC |
| Life span | 50000 Burning Hours |
| Power factor | >0.9 |
| Power cable | High Temperature Silicon 2C×1mm² |
| Dimming | Triac / PWM / 1-10V / DALI |

| Build & protection | |
|---|---|
| Fixture colour | Black / Graphite Gray / Off-white / Silver |
| Ingress protection | IP 66 |
| Impact rating (IK) | 07 |
| Body | Made of Extruded Aluminium with Power Coated |
| Glass | Clear toughened glass of 4mm thickness |
| Accessories | IP 67 Connectors |




Product view


## Versions available on our website

| | |
|---|---|
| **Size & Wattage** | 500mm 12W · 1000mm 18W · 1000mm 24W |
| **LED Colour** | Single Colour(27k/3k/4k/6k) · RGB |
| **Input Voltage** | 12V DC · 24V DC |

## Dimensions (mm)

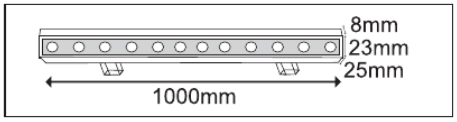


1000 mm

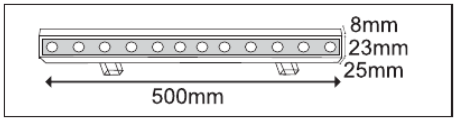


500 mm

**CE** **IP66** **Class I earthing**

Honeycomb Louvre Available on Request

