


A photograph of a wooden log cabin at night. The cabin has a gabled roof and is illuminated by warm, yellow LED lights. A small dog is sitting on the wooden deck in front of the cabin. The deck is also lit with warm lights. The background is dark, showing some trees and a clear night sky.

SENSE YOUR PRESENCE

The perfect energy
Efficient led light. it
Is perfect for your
Every day lighting-
IP65.

OCTX-LUOPRO

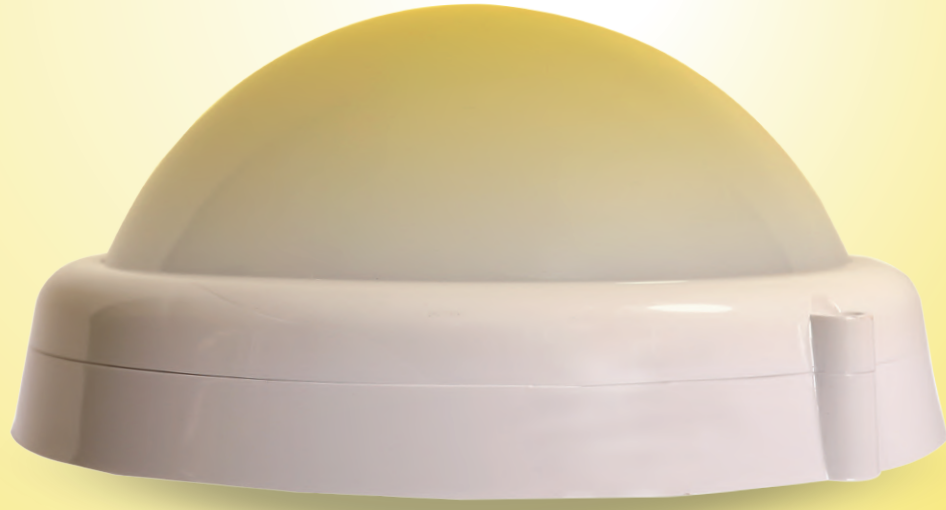



OCTX-LUOPRO-DM

MODEL No

OCTXLUP16DM

Input Voltage	110-300V
Input current	65 mA
Watt	16W
Operating frequency	50 Hz
Power factor	≥0.95
Output voltage	80V
Output current	180-190 mA
Driver efficiency	≥90%
Operating temperature	(-15°C TO 55°C)
Led driver	Constant current LED Driver
Built in surge protection	4 KV
Internal wiring	Insulated Cu wire
Led	LM80 certified LED
Led life	50000 hours
Led lumen Efficiency	1500 lm
CCT	6500K/4000K/3000K
CRI	≥80
Sensor principal	HFPD Int. Detector+ DOP
Sensing Time	0.012 msec
Operating Frequency	4.8GHz+ DO Effect
Dim/on-off	Dim (16W to 5W)
Transmission power	<0.2mW
Detection range	Upto 9 Mtrs
Detection angle	120° to 360°
Hold time	20 Sec
Main housing	Poly Carbonate
PC diffuser	PC diffuser
Hardwares	SS & MS Zinc plated
Ingress protection	IP65
Housing Type	Round surface light .
SIZE (D*H)mm	183X83.
BIS	Approved
EMC	Approved



Energy Saving



Motion Detection



Auto Dimmable



Upto 9m
Detection Range



Eco- Friendly



Over Voltage
Protection




No Uv Radiation



IP65



360°Detection



WORKING

TURN On light at Full Bright
when Person/Object detect in
Range and TURN Dim to 25%
when they move out.



OCTX-LUOPRO-XM

MODEL No

OCTXLUP16XM

Input Voltage	110-300V
Input current	65 mA
Watt	16W
Operating frequency	50 Hz
Power factor	≥0.95
Output voltage	80V
Output current	450-500 mA
Driver efficiency	≥90%
Operating temperature	(-15°C TO 55°C)
Led driver	Constant current LED Driver
Built in surge protection	4 KV
Internal wiring	Insulated Cu wire
Led	LM80 certified LED
Led life	50000 hours
Led lumen Efficiency	1500 lm
CCT	6500K/4000K/3000K
CRI	≥80
Sensor principal	HFPD Int. Detector+ DOP
Sensing Time	0.012 msec
Operating Frequency	4.8GHz+ DO Effect
Dim/on-off	Auto On/Off
Transmission power	<0.2mW
Detection range	Upto 9 Mtrs
Detection angle	120° to 360°
Hold time	40 Sec
Main housing	Poly Carbonate
PC diffuser	PC diffuser
Hardness	SS & MS Zinc plated
Ingress protection	IP65
Housing Type	Round surface light ..
SIZE (D*H)mm	183X83.
BIS	Approved
EMC	Approved



Energy Saving



Motion Detection



Auto On/Off



Upto 9m
Detection Range



Eco- Friendly



Over Voltage
Protection




No Uv Radiation



IP65



360°Detection



WORKING

TURN On light at Full
Bright when Person/Object
detect in Range and TURN
Off Only when they move out



OCTX-LUOPRO-XPB

MODEL No

OCTXLUP16XPB

Input Voltage	110-300V
Input current	65 mA
Watt	16W
Operating frequency	50 Hz
Power factor	≥0.95
Output voltage	80V
Output current	180-190 mA
Driver efficiency	≥90%
Operating temperature	(-15°C TO 55°C)
Led driver	Constant current LED Driver
Built in surge protection	4 KV
Internal wiring	Insulated Cu wire
Led	LM80 certified LED
Led life	50000 hours
Led lumen Efficiency	1500 lm
CCT	6500K/4000K/3000K
CRI	≥80
Sensor principal	HFPD Int. Detector+ DOP
Sensing Time	0.012 msec
Operating Frequency	4.8GHz+ DO Effect+PH
Dim/on-off	Auto On/Off
Transmission power	<0.2mW
Detection range	Upto 9 Mtrs
Detection angle	120° to 360°
Hold time	40 Sec
Main housing	Poly Carbonate
PC diffuser	PC diffuser
Hardness	SS & MS Zinc plated
Ingress protection	IP65
Housing Type	Round surface light .
SIZE (D*H)mm	183X83.
BIS	Approved
EMC	Approved



Energy Saving



Motion Detection



Auto On/Off



Inbuilt Day Night



Eco- Friendly



Over Voltage Protection



No Uv Radiation




IP65



360° Detection



Upto 9m Detection Range



WORKING

TURN On light at Full Bright in Dark area when Person/Object detect in Range and TURN Off Only when they move out. it will work only dark area.