







SURFACE MOUNT WALL GRAZER WITH VISOR

Technical Data Sheet

Watt	: 8W / 12W / 18W / 24W / 36W / 48W
CCT	: 2700K / 3K / 4K / 6K / RGB / RGBW
Lumens	: 680 / 1020 / 1530 / 2040 / 3060 / 4080 Lm
Input Voltage	: 220VAC-12VDC -24VDC
Angle	: 6° / 15° / 24° / 36° / 60° / 15° x 30° / 15° x 55°
LED	: SMD
Honeycomb	: Optional
Fixture Colour	: Black / Graphite gray / Off-white / Silver
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 66
IK	: 07
Body Material	: Made of Extruded Aluminum with Powder Coated
Glass Material	: Clear toughened glass of 4mm thickness
Accessories	: IP 67 Connectors : Honeycomb Louvre Option Available
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 500mm
Dimmable Support	: Triac-PWM-1-10V Dali



☐ RLC-SLWG-3055-300mm-8W/12W | SLWG-3055-500mm-12W/18W | SLWG-3055-600mm-18W/24W
☐ SLWG-3055-1000mm-18W/24W/36W | SLWG-3055-1200mm-24W/36W/48W



NOTE : SLWG-Surface Mount Linear Wall Grazer






Honeycomb Louvre Available on Request




SURFACE MOUNT WALL GRAZER SLEEK

Technical Data Sheet

Watt	: 8W / 12W / 18W / 24W / 36W / 48W
CCT	: 2700K / 3K / 4K / 6K / RGB / RGBW
Lumens	: 680 / 1020 / 1530 / 2040 / 3060 / 4080 Lm
Input Voltage	: 220VAC-12VDC -24VDC
Angle	: 6° / 15° / 24° / 36° / 60° / 15° x 30° / 15° x 55°
LED	: SMD
Honeycomb	: Optional
Fixture Colour	: Black / Graphite gray / Off-white / Silver
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 66
IK	: 07
Body Material	: Made of Extruded Aluminium with Powder Coated
Glass Material	: Clear toughened glass of 4mm thickness
Accessories	: IP 67 Connectors : Honeycomb Louvre Option Available
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 500mm
Dimmable Support	: Triac-PWM-1-10V Dali



■ RLC-SLWG-3030-300mm-8W/12W | SLWG-3030-500mm-12W/18W | SLWG-3030-600mm-18W/24W
■ SLWG-3030-1000mm-18W/24W/36W | SLWG-3030-1200mm-24W/36W/48W



NOTE : SLWG-Surface Mount Linear Wall Grazer






Honeycomb Louvre Available on Request




SURFACE MOUNT WALL GRAZER

Technical Data Sheet

Watt	: 8W / 12W / 18W / 24W / 36W / 48W / 60W
CCT	: 2700K / 3K / 4K / 6K / RGB / RGBW
Lumens	: 720 / 960 / 1440 / 1920 / 2850 / 3840 / 4800 Lm
Input Voltage	: 220Vac -12Vdc -24Vdc
Angle	: 6° / 15° / 24° / 36° / 60° / 15° x 30° / 15° x 55°
LED	: SMD
Honeycomb	: Optional
Fixture Colour	: Black / Graphite gray / Off-white / Silver
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 66
IK	: 07
Body Material	: Made of Extruded Aluminium with Powder Coated
Glass Material	: Clear toughened glass of 4mm thickness
Accessories	: IP 67 Connectors : Honeycomb Louvre Option Available
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 500mm
Dimmable Support	: Triac-PWM-1-10V Dali




■ RLC-SLWG-4560-300mm-12W | SLWG-4560-500mm-12W/18W | SLWG-4560-600mm-18W/24W
■ SLWG-4560-1000mm-18W/24W/36W/48W | SLWG-4560-1200mm-24W/36W/48W/60W



Honeycomb Louvre Available on Request

NOTE : SLWG-Surface Mount Linear Wall Grazer

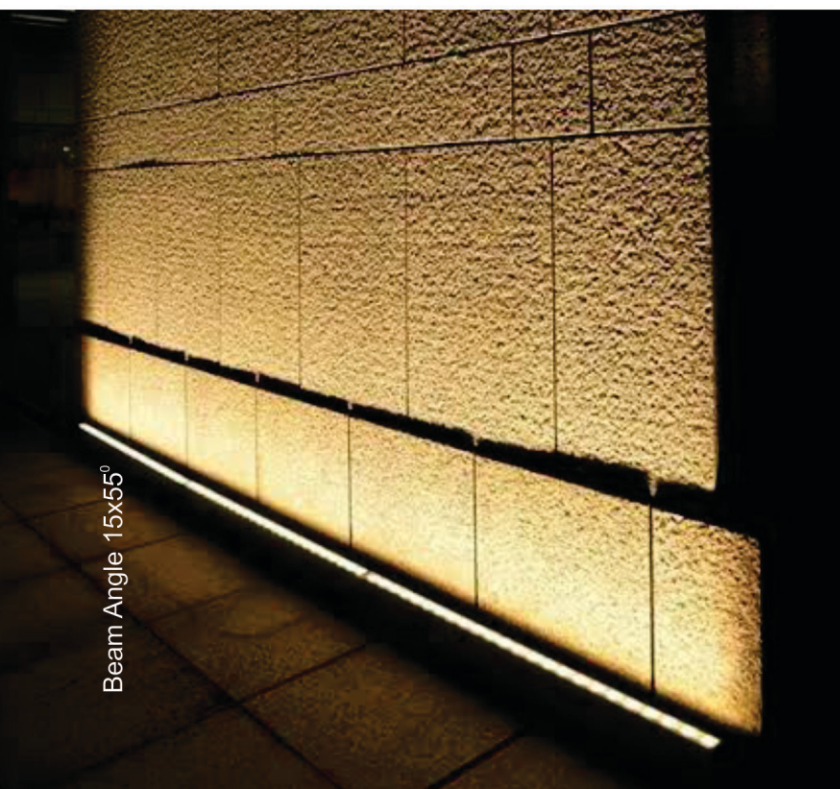

Beam Angle 15x55°






17



Beam Angle 24°

Technical Data Sheet


Watt	: 8W / 12W / 18W / 24W / 36W / 48W / 60W
CCT	: 2700K / 3K / 4K / 6K / RGB / RGBW
Lumens	: 720 / 960 / 1440 / 1920 / 2850 / 3840 / 4800 Lm
Input Voltage	: 220Vac -12Vdc -24Vdc
Angle	: 6° / 15° / 24° / 36° / 60° / 15° x 30° / 15° x 55° / Diffused
LED	: SMD
Honeycomb	: Optional
Fixture Colour	: Black / Graphite gray / Off-white / Silver
Life Span	: 50000 Hours
CRI	: >85
PF	: >0.9
Ingress Protection	: IP 67
IK	: 09
Body Material	: Made of Extruded Aluminium with Powder Coated
Housing Material	: Housing Made of GI Powder Coated
Glass Material	: Clear toughened glass of 8mm thickness
Accessories	: IP 67 Connectors : Honeycomb Louvre Option Available
Power Cable	: High Temperature Silicon 3Cx1.5mm ² of 500mm
Dimmable Support	: Triac-PWM-1-10V Dali

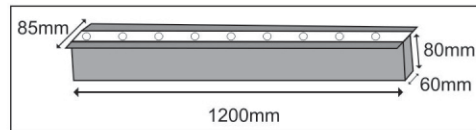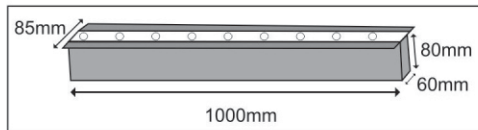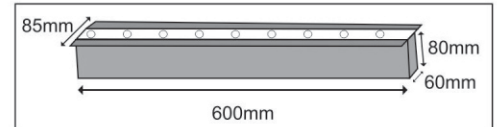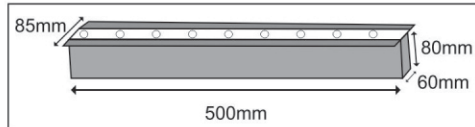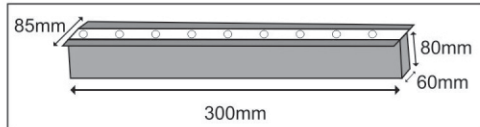

■ RLC-RLWG-8565-300mm-12W | RLWG-8565-500mm-12W/18W | RLWG-8565-600mm-18W/24W
■ RLWG-8565-1000mm-18W/24W/36W/48W | RLWG-8565-1200mm-24W/36W/48W/60W

NOTE : RLWG-Recessed Linear Wall Grazer

Linear Honeycomb



Honeycomb Louvre Available on Request



Beam Angle 15x55°

18



Beam Angle 6°

